



SUMMARY TEST DATA ON P1T-DC40G-65-T-292FF-1NS-OPT18G-50OHM

Customer: _____
 SO No: _____
 Model No: P1T-DC40G-65-T-292FF-1NS-OPT18G-50OHM
 Serial No: PL33669/2134

Tested By: A. Lopez
 Temperature: +25°C
 Date: 8/27/2021
 Drawing No: 27630283 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range:	DC to 18 GHz	DC to 18 GHz	PMI QA 2	
2	Isolation:	60 dB Typ. 55 dB Min.	61 dB See Graph		
3	Insertion Loss:	4.5 dB Typ 5.0 dB Max.	3.45 dB See Graph		
4	VSWR: In/Out	2.0:1 Typ. 2.2:1 Max.	In 1.42:1 Out 1.43 :1 See Graph		
5	Input Power:	+17 dBm CW Max.	Pass See Typical Characteristics		
6	Switching Speed:	6 ns Typ. 7 ns Max.	Pass See Typical Characteristics		
7	Rise/Fall Time:	1 ns Typ. 2 ns Max.	Pass See Typical Characteristics		
8	Control Signal:	TTL "1" On Internally Terminated to 50 Ω	Pass		
9	Video Transients:	300 MHz BW (2 to 18 GHz): 85 mV P-P 20 MHz BW (2 to 18 GHz): 15 mV P-P	Pass See Typical Characteristics		
10	DC Supply:	+8 to +15 V @ 15 mA Max. -8 to -15 V @ 40 mA Max.	+8 to +15 V @ 8 mA -8 to -15 V @ 27 mA		PMI QA 2

QA/QC Approval: 

PMI
QA 2

Date: 8/27/2021




SUMMARY TEST DATA

PL33669/2134


ON

P1T-DC40G-65-T-292FF-1NS-OPT18G-50OHM

Insertion Loss

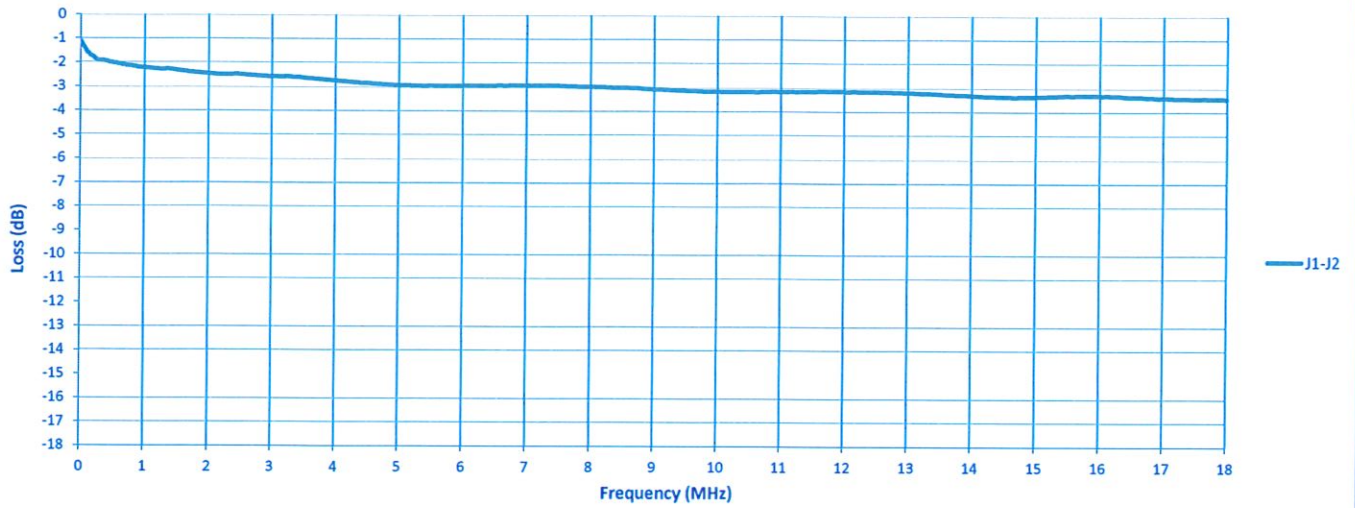

VSWR

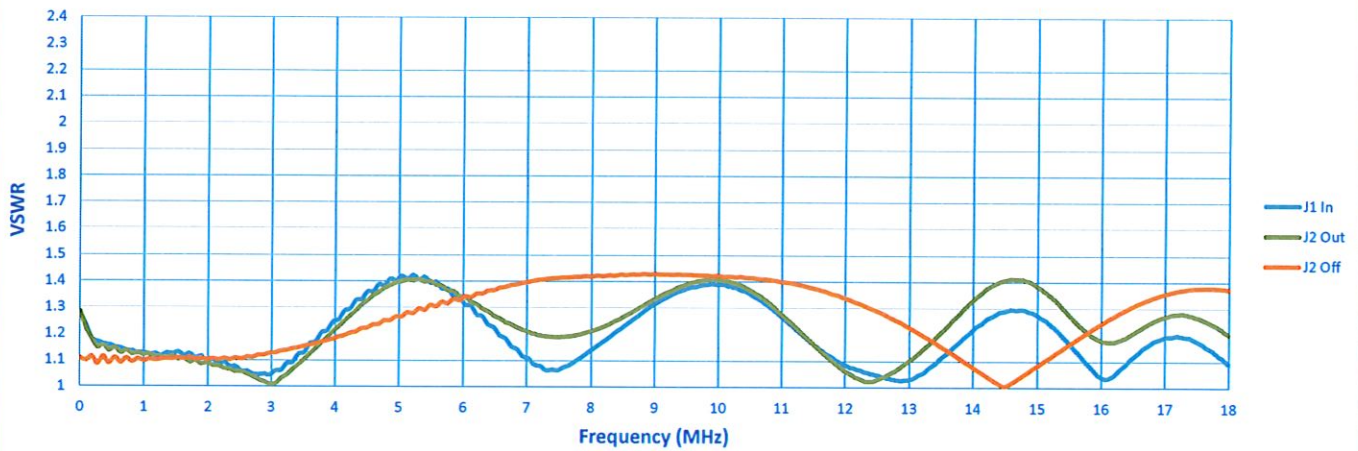

Isolation

