



**SUMMARY TEST DATA
ON
P1T-6G12G-80-T-SFF-1W**

PL35307/2201

Customer: _____ Tested By: L. McGraw
SO No: _____ Temperature: +25°C
Model No: P1T-6G12G-80-T-SFF-1W Date: 01/05/22
Serial No: PL35307/2201 Drawing No: 27633390 Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range:	6.0 to 12.0 GHz	6.0 to 12.0 GHz	PMI QA 2	
2	Insertion Loss:	1.75dB Max	1.70dB (See Plot)		
3	Isolation:	80dB Min	87dB (See Plot)		
4	VSWR:	2.0:1 Max (1.5:1 Goal)	1.3:1		
5	Switching Speed:	25ns Typ	23.8ns		
6	Operating Power:	+30dBm Max	Pass		
7	Control	TTL Logic "0" = Insertion Loss "1" = Isolation	Pass		
8	Power Supply:	+5VDC @ 50mA Max -15VDC @ 75mA Max	40mA 70mA		PMI QA 2

QA/QC Approval:

PMI
QA 2

Date:

1/6/2022


7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com



**SUMMARY TEST DATA
ON
P1T-6G12G-80-T-SFF-1W**

PL35307/2201

Insertion Loss – Return Loss

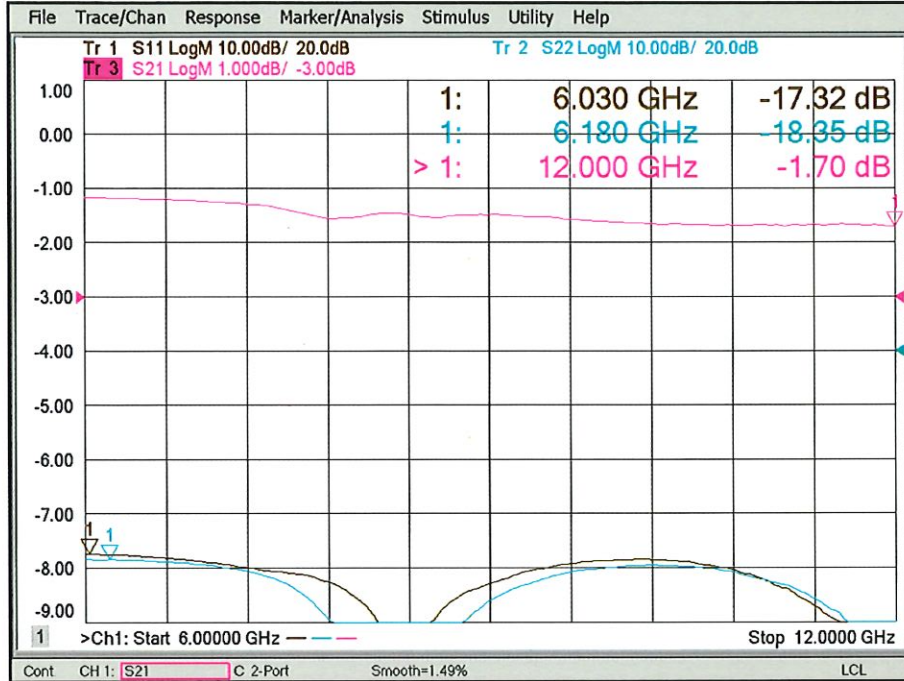

Isolation & Return Loss

