



**SUMMARY TEST DATA
ON
PLDRO-12522R24M-13DBM-SFF**

PL36198/2215

Customer: _____ Tested By: S. O'Neill
SO No: _____ Temperature: +25°C
Model No: PLDRO-12522R24M-13DBM-SFF Date: 04/05/2022
Serial No: PL36198/2215 Drawing No: 27634480 Rev: B1

TEST ITEM	PARAMETERS	SPECIFIED VALUE		TEST RESULTS	QA QC
1	Frequency Range (fo)	12.52224 GHz		12.52224 GHz	PMI QA 2
2	External Reference	130.44 MHz		130.44 MHz	
3	Reference Input Power	0 ± 3 dBm		0 ± 3 dB	
4	Output Power	13 dBm Min		13.18 dBm	
5	Spurious	-70 dBc Max In Band		-80.92 dBc	
6	Harmonics	-20 dBc Max		-34.61 dBc	
7	Phase Noise	-67 dBc/Hz Min	100 Hz	See Typical Characteristics	
		-96 dBc/Hz Min	1 kHz		
		-110 dBc/Hz Min	10 kHz		
		-115 dBc/Hz Min	100 kHz		
		-130 dBc/Hz Min	1 MHz		
8	DC Power	+12 to +15V @ 350 mA Max		+15@ 233 mA	
9	Lock Detect	TTL High In Lock		Pass	PMI QA 2

QA/QC Approval: _____

PMI
QA 2

Date: _____


4/6/2022




**SUMMARY TEST DATA
ON
PLDRO-12522R24M-13DBM-SFF**

PL36198/2215

Carrier Signal

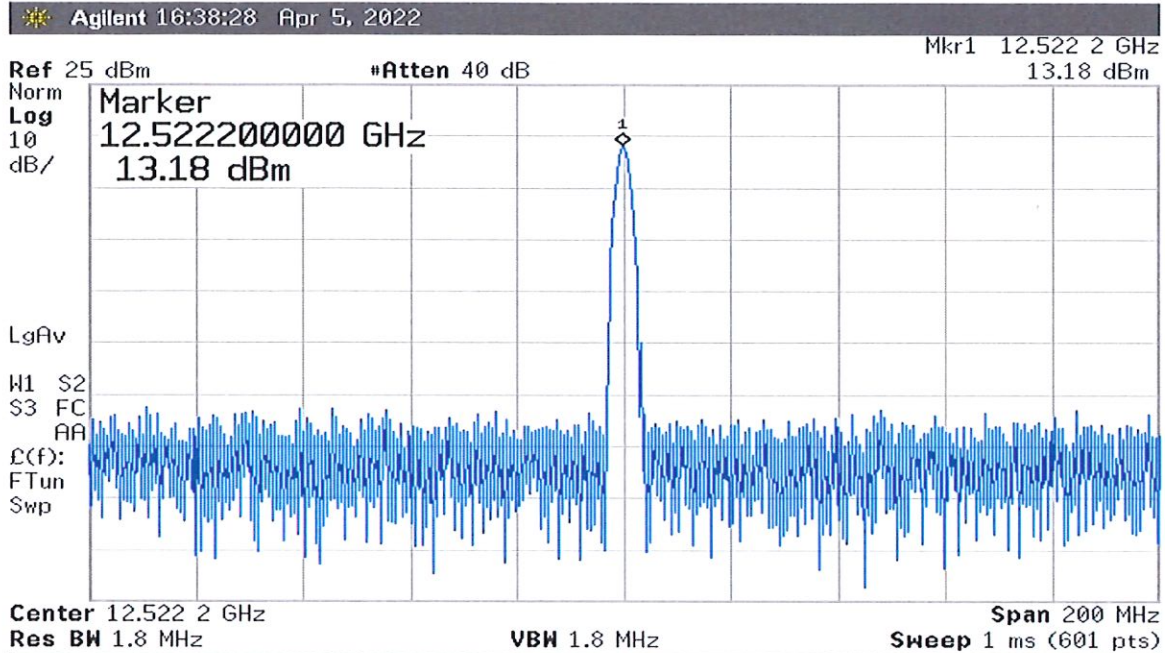

Spurious

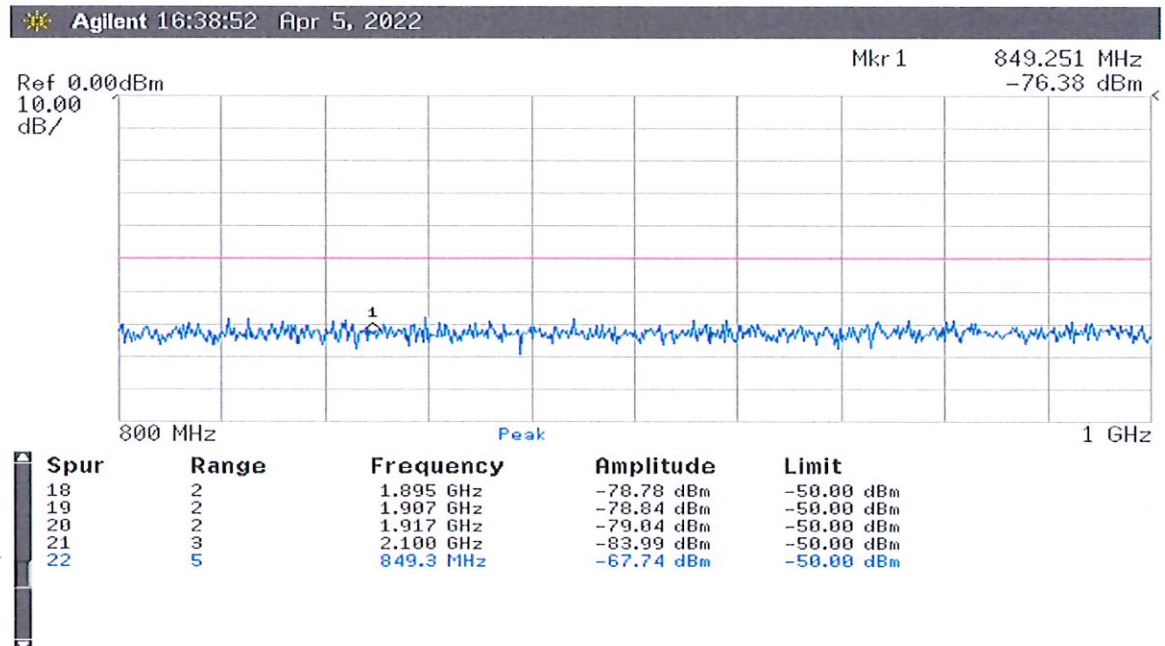




**SUMMARY TEST DATA
ON
PLDRO-12522R24M-13DBM-SFF**

PL36198/2215

Harmonics

Agilent 16:39:09 Apr 5, 2022

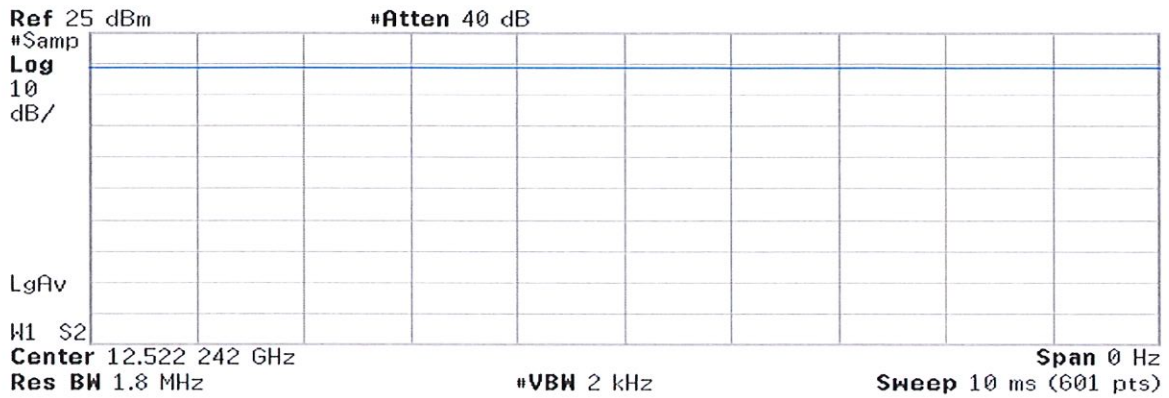

	Frequency	Amplitude
1	12.52 GHz	13.90 dBm
2	25.04 GHz	-39.25 dBc
3	37.57 GHz	-36.54 dBc
4	50.09 GHz	-34.61 dBc