

**SUMMARY TEST DATA
ON
DP-1D2G-2D725G-CD-SFF**

Customer:

Tested By: Y Li

SO No:

Temperature: 25°C

Model No: DP-1D2G-2D725G-CD-SFF

Date: 12/19/2022

Serial No: PL38961/2250

Drawing: 27644840 Rev A1

Low Passband

TEST ITEM	PARAMETERS	SPECIFIED VALUE	Test Results	QA/QC
1	Low Passband	0.5 - 1.82 GHz	0.5 - 1.82 GHz	PM/QA2
2	Insertion Loss*	2 dB MAX	1.6 dB	
3	2 dB Crossover	1.84 GHz TYP 1.82 GHz MIN	1.86 GHz	
4	VSWR*	2.0:1 MAX	1.8:1	
5	Rejection (50 dB TYP, 45 dB MIN)	DC - 0.3 GHz & 2.2 - 4.4 GHz	61.02 dB	

High Passband

6	High Passband	1.98 - 3.55 GHz	1.98 - 3.55 GHz		
7	Insertion Loss*	2 dB MAX	1.31 dB		
8	2 dB Crossover	1.95 GHz TYP 1.98 GHz MAX	1.94 GHz		
9	VSWR*	2.0:1 MAX	1.8:1		
10	Rejection (50 dB TYP, 45 dB MIN)	DC - 1.6 GHz & 4.0 - 8 GHz	58.09 dB		

General Specifications

11	Crossover	1.9 GHz / 6 dB IL NOM	6.9 dB	
12	Power Handling	1 W MAX	See Typical Characteristics	PMI QA2

*Excluding crossover region defined as 1.82 - 1.98 GHz

QA/QC Approval:



PMI
QA2



Date:

12/21/2022

**SUMMARY TEST DATA
ON
DP-1D2G-2D725G-CD-SFF**

PL38961/2250

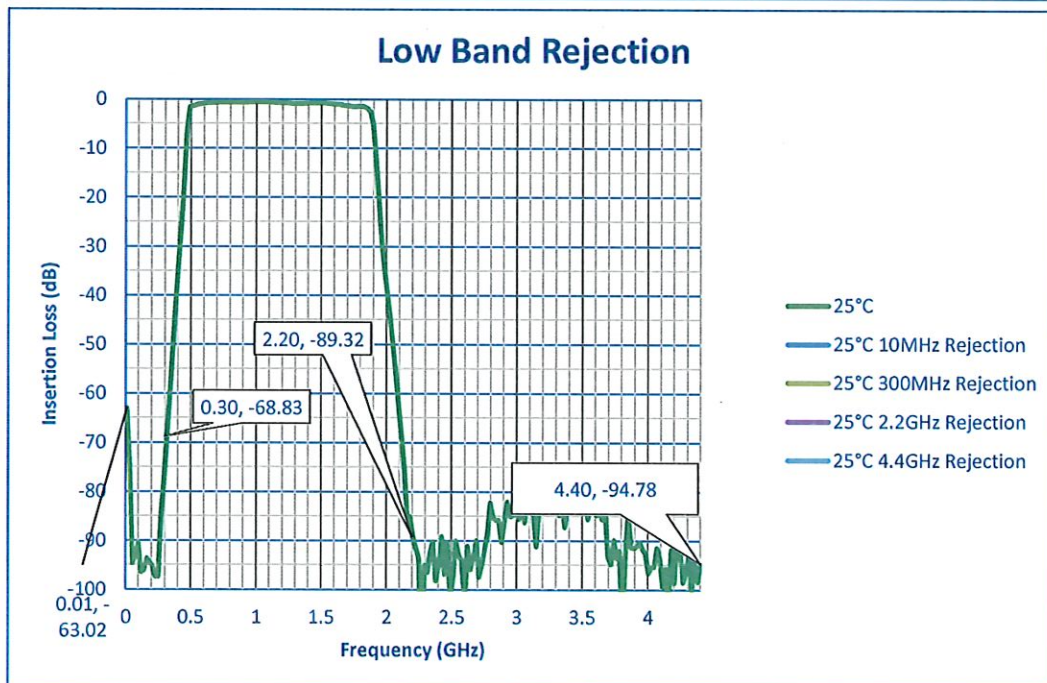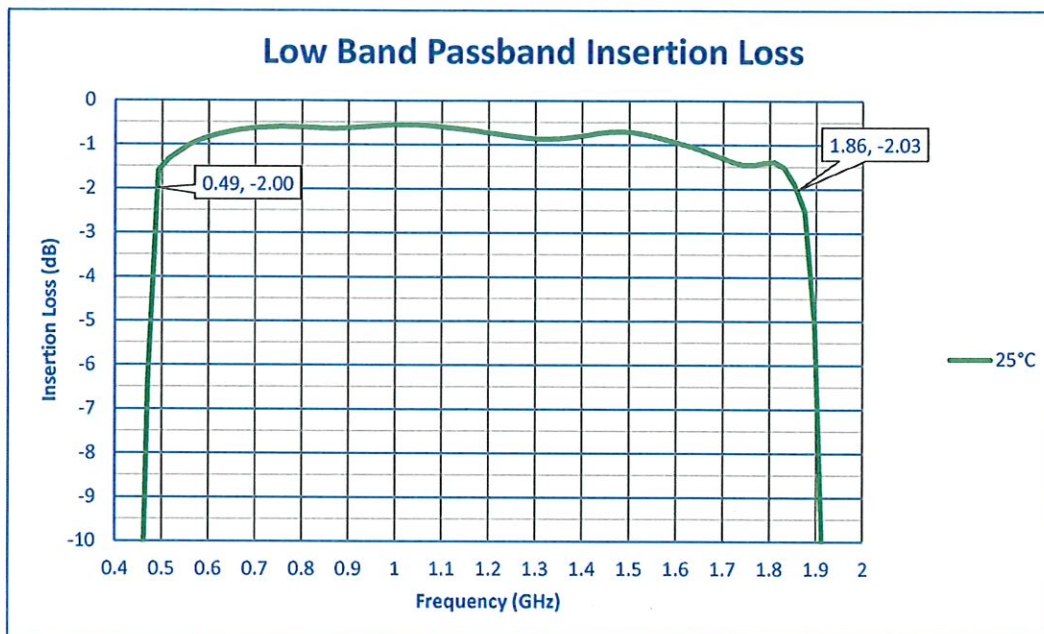

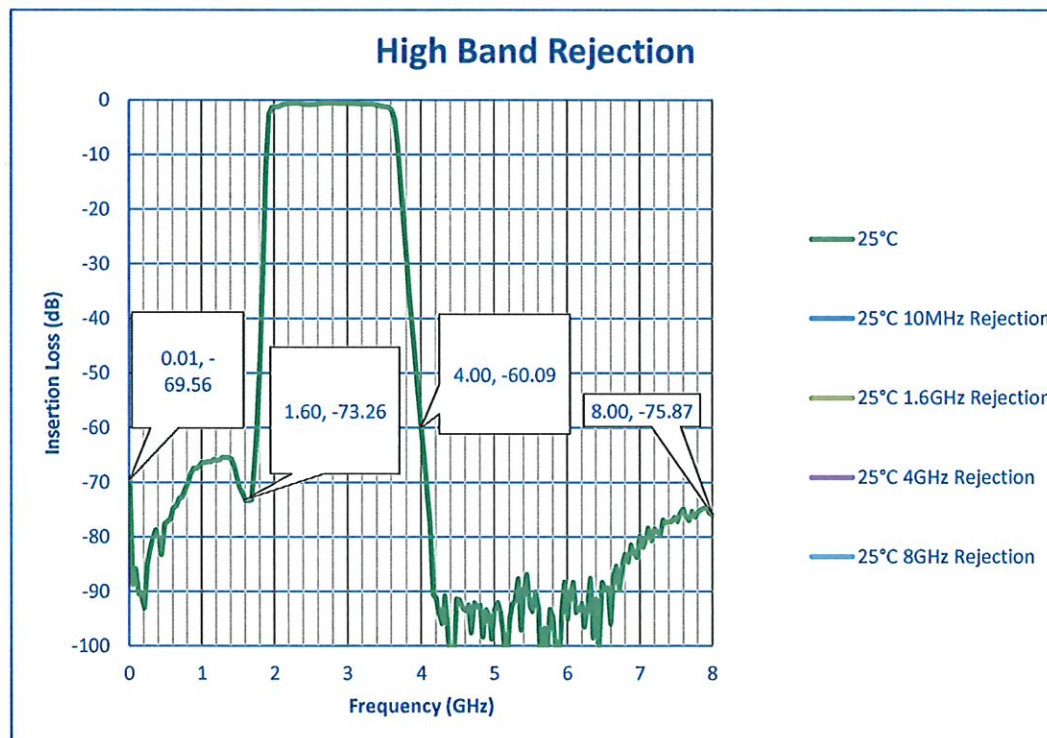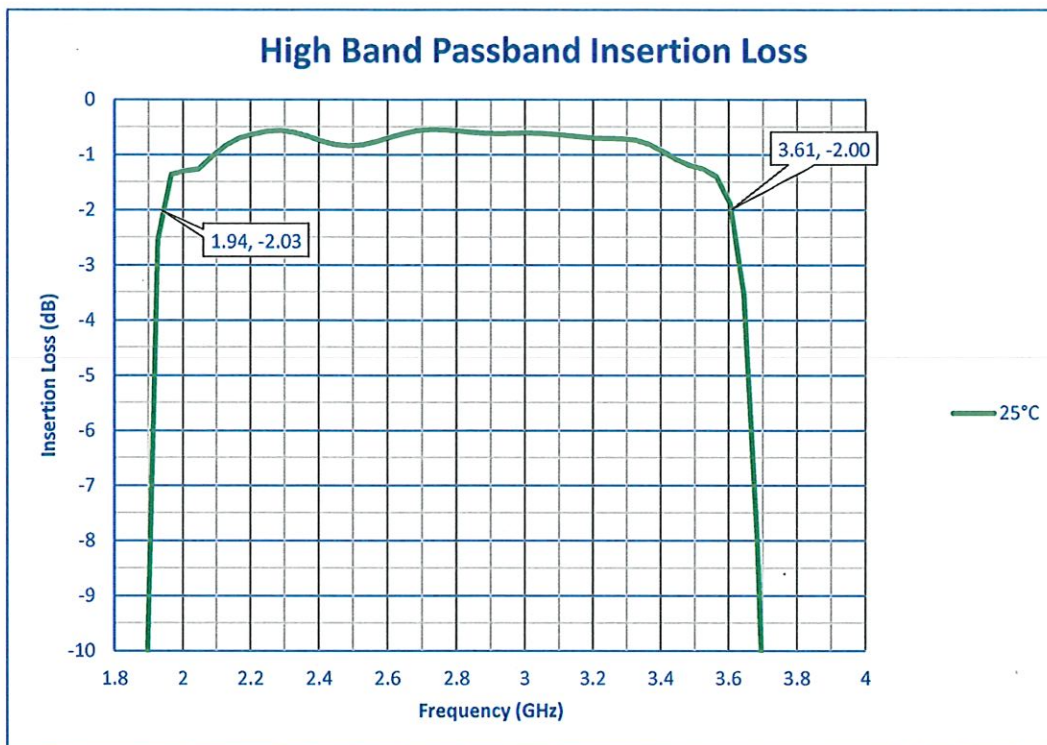

**SUMMARY TEST DATA
ON
DP-1D2G-2D725G-CD-SFF**

PL38961/2250

