

**SUMMARY TEST DATA
ON
DP-1D2G-2D725G-CD-SFF**

Customer: PMI Tested By: Y Li
 SO No: PMI Temperature: 25°C
 Model No: DP-1D2G-2D725G-CD-SFF Date: 12/19/2022
 Serial No: PL38963/2250 Drawing: 27644840 Rev A1

Low Passband

TEST ITEM	PARAMETERS	SPECIFIED VALUE	Test Results	QA/QC
1	Low Passband	0.5 - 1.82 GHz	0.5 - 1.82 GHz	PMI QA2
2	Insertion Loss*	2 dB MAX	1.86 dB	
3	2 dB Crossover	1.84 GHz TYP 1.82 GHz MIN	1.86 GHz	
4	VSWR*	2.0:1 MAX	1.97:1	
5	Rejection (50 dB TYP, 45 dB MIN)	DC - 0.3 GHz & 2.2 - 4.4 GHz	67.52 dB	

High Passband

6	High Passband	1.98 - 3.55 GHz	1.98 - 3.55 GHz	
7	Insertion Loss*	2 dB MAX	1.38 dB	
8	2 dB Crossover	1.95 GHz TYP 1.98 GHz MAX	1.94 GHz	
9	VSWR*	2.0:1 MAX	1.8:1	
10	Rejection (50 dB TYP, 45 dB MIN)	DC - 1.6 GHz & 4.0 - 8 GHz	55.7 dB	

General Specifications



11	Crossover	1.9 GHz / 6 dB IL NOM	6.4 dB	
12	Power Handling	1 W MAX	See Typical Characteristics	PMI QA2



*Excluding crossover region defined as 1.82 - 1.98 GHz

QA/QC Approval:  PMI QA2 Date: 12/21/2022

SUMMARY TEST DATA
ON
DP-1D2G-2D725G-CD-SFF

PL38963/2250

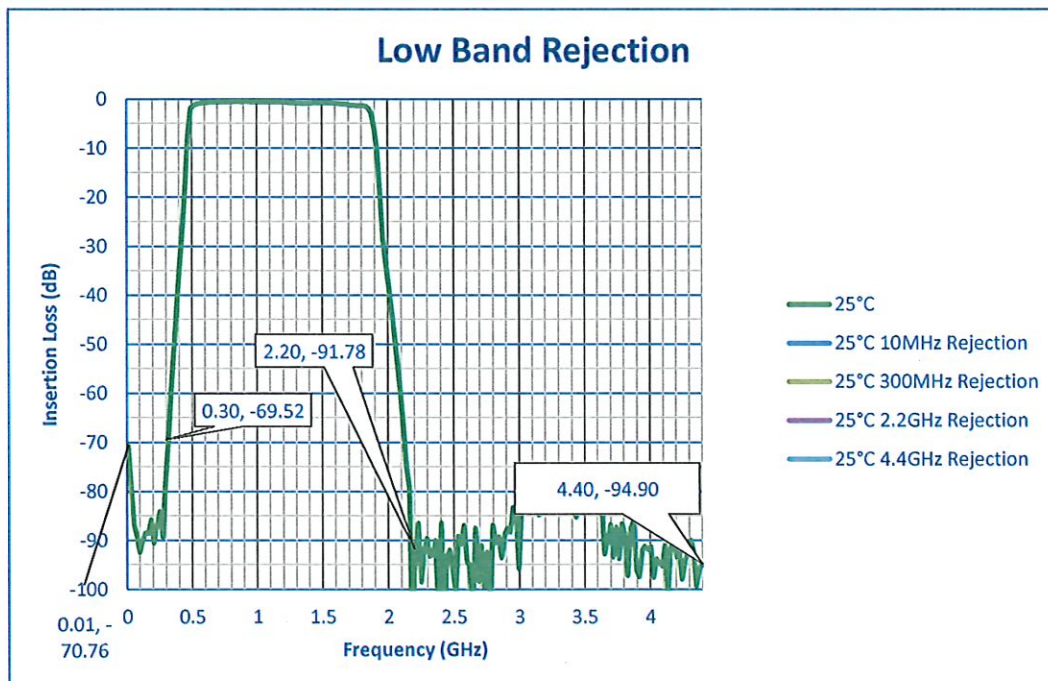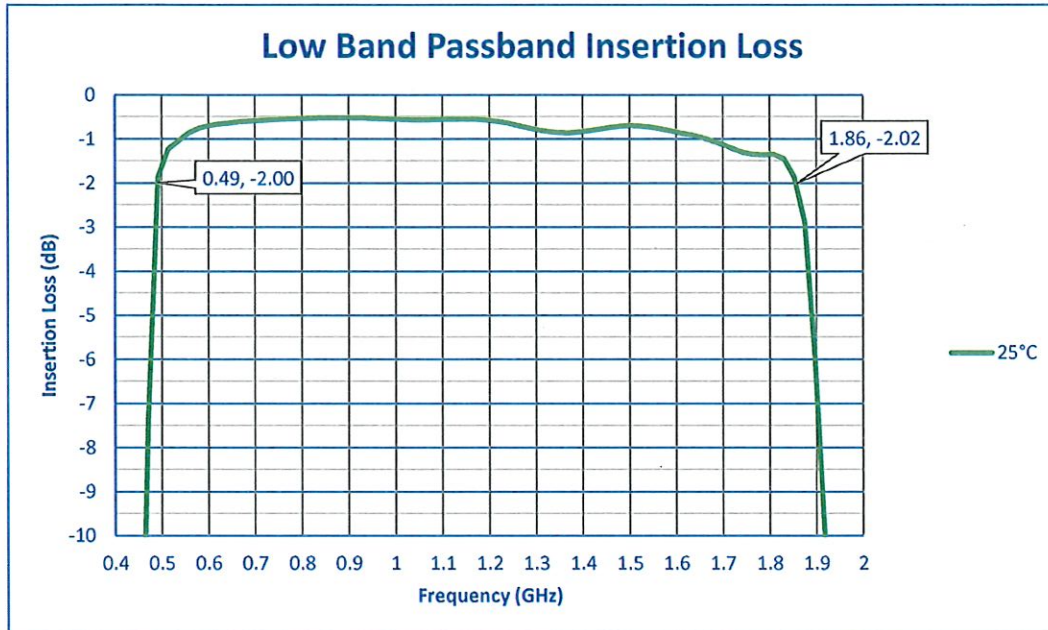

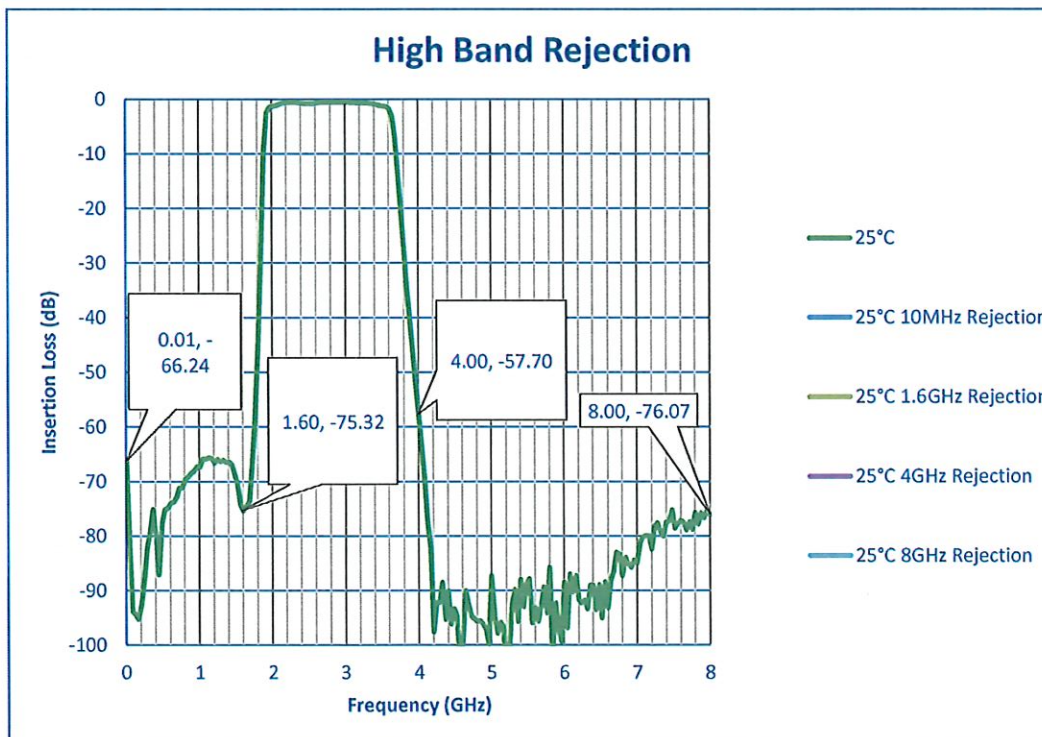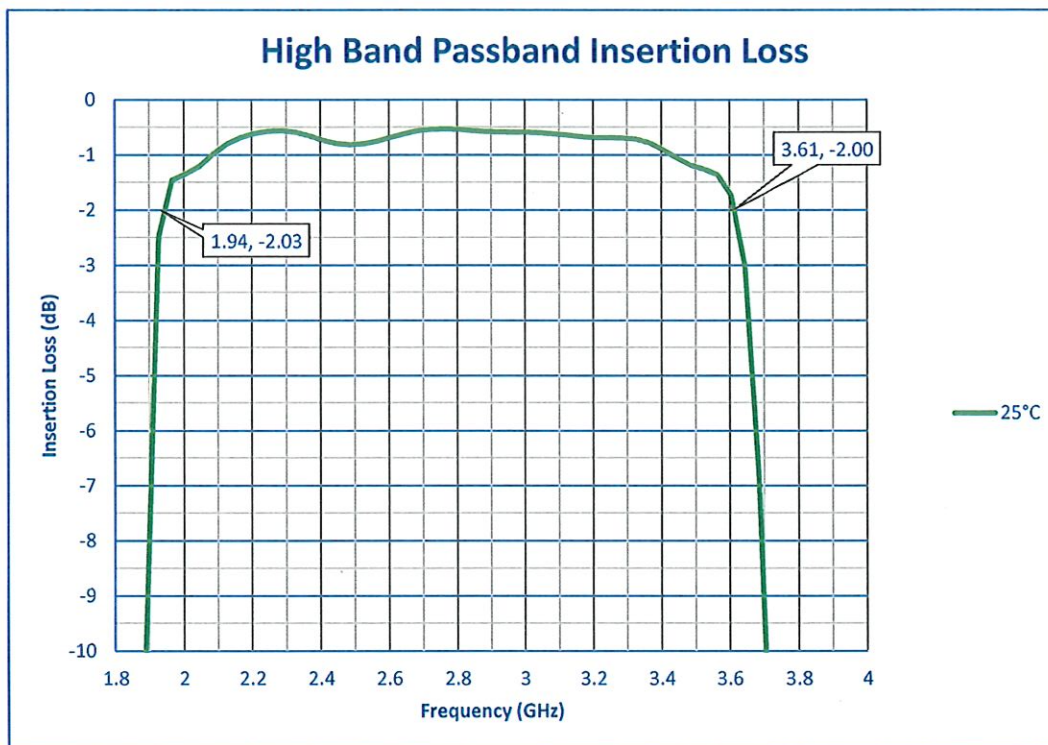

**SUMMARY TEST DATA
ON
DP-1D2G-2D725G-CD-SFF**

PL38963/2250

