


**SUMMARY TEST DATA
ON
P8T-20M18G-80-R-512-SFF**

Customer: _____
 SO No: _____
 Model No: P8T-20M18G-80-R-512-SFF
 Serial No: PL41067/2325

Tested By: S. O'Neill
 Temperature: +25° C
 Date: 6/20/2023
 Drawing No: 27616149 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range	0.012 GHz to 18 GHz	0.012 GHz to 18 GHz	PMI QA2	
2	Isolation	80 dB Min.	84.1 dB		
3	Insertion Loss	4.5 dB Max. 4 dB Typ.	3.9 dB		
4	VSWR: In/Out	2:1 Max.	1.76:1 In 1.88:1 Out		
5	Input Power	23 dBm CW Max.	Pass See Typical Characteristics		
6	DC SUPPLY	+5VDC @ 300 mA Max. -12VDC @ 100 mA Max.	+5VDC @ 269 mA -12VDC @ 92 mA		
7	Switching Speed	1000 ns Max.	Pass See Typical Characteristics		PMI QA2

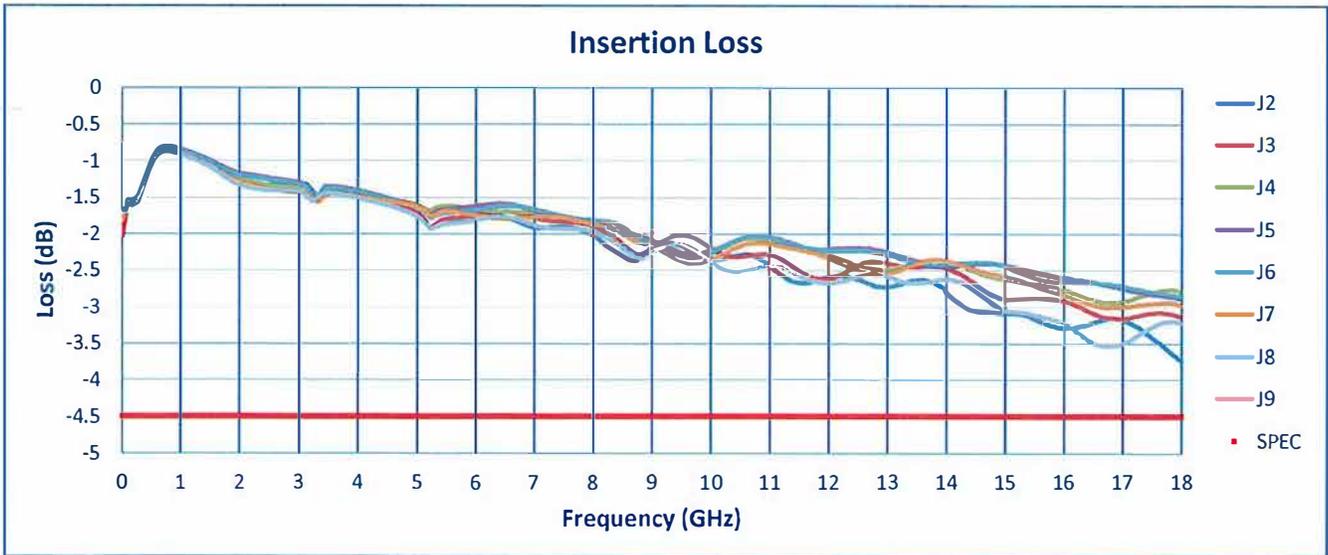

QA/QC Approval: _____
 PMI
QA2

Date: 6/20/2023

SUMMARY TEST DATA ON P8T-20M18G-80-R-512-SFF

