


DASH NO.	APPLICATION		REVISIONS			
	NEXT ASSY	USED ON	REV	DESCRIPTION	DATE	APPROVED
			1	RELEASE PER ECO 100791	1-9-07	JM
			2	REVISE PER ECO 101093	7-29-13	JM
			A1	ECN # 17-0281	12-29-17	

REVISION	SHT NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
STATUS	LETTER	2	2																		

21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45

46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70

<p>PMI CONFIDENTIAL & PROPRIETARY: The information contained herein is the property of PMI. Its use or reproductions is prohibited except as provided for by prior written authorization from PMI</p>	<p>PLANAR MONOLITHICS INDUSTRIES, INC.</p> <p>4921 ROBERT J. MATHEWS PKWY, EL DORADO HILLS CA 95762 916-542-1401</p>
CONTRACT NO.	<p>TEST DATA SHEET THRESHOLD DETECTOR GMTA-1003</p>
DRAWN: CAMERON N 1-09-07	
CHECKED	
PROJ ENGR JOHN M 1-09-07	
PROG MGR	
MFG. ENGR	
QA ENGR	
RELIABILITY:	
CUSTOMER	

	SIZE A	CAGE CODE 71A34	DWG. NO. ETD000030	REVISION A1
	SCALE			SHEET 1 OF 2

MODEL NO.: GMTA-1003

FREQUENCY: 8 – 18 GHz

SERIAL NO.: PL41631

PARAMETER	SPECIFICATION	MEASUREMENT
THRESHOLD LEVEL	Pin = -42 dBm @ 25 ° C	-42.3 dBm Average
RESPONSE TIME @ TTL " I " / TTL " O "	100 μs max	<10us
INPUT VSWR	2.5 : 1 @ Pin = -10 dBm	2.29:1 See Attached Plots
DC POWER SUPPLY NO RF SIGNAL	+12V @ 200 mA	62mA

THRESHOLD SETTING STABILITY

± 3 dB max OVER FREQUENCY @ TEMPERATURE

FREQ.	8 GHz	10 GHz	12 GHz	14 GHz	16 GHz	18 GHz
Pin @ 25 ° C	-42.8	-43.3	-42.3	-42.2	-42.7	-40.6
Pin @ 0 ° C	-42.7	-43.2	-42.1	-42.3	-42.9	-40.6
Pin @ 85 ° C	-42.0	-42.5	-41.4	-41.3	-42.2	-39.9



SIZE
A

CAGE CODE
71A34

DWG. NO.
ETD000030

REVISION A1

SCALE


SHEET 2 OF 2

MODEL NO.: GMTA-1003

FREQUENCY: 8 – 18 GHz

SERIAL NO.: PL41631

Input VSWR

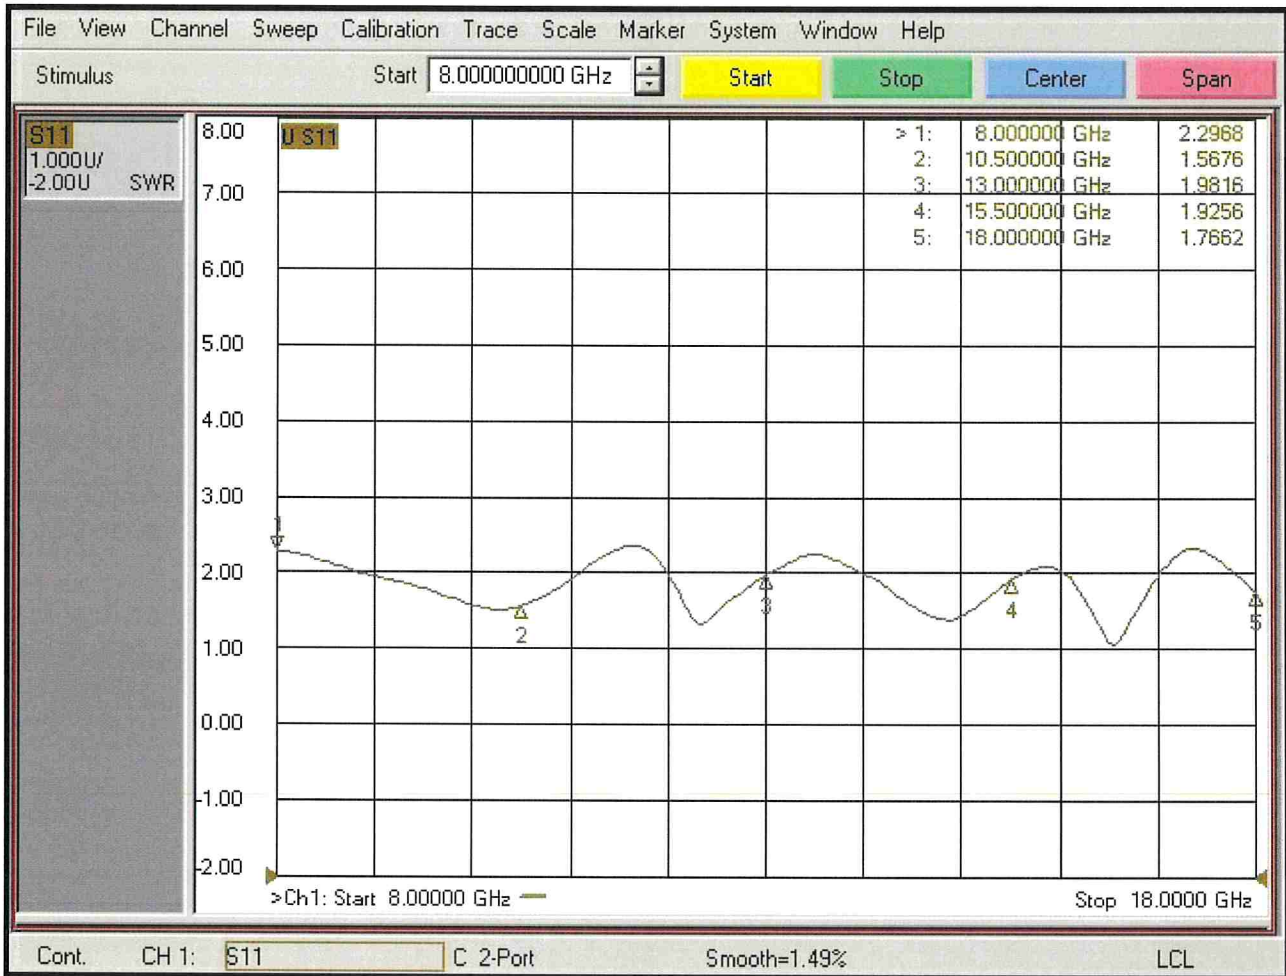

TESTED BY: [Signature]
QA BY: a Zimmerman

DATE: 8/18/23
DATE: 8-18-23

	SIZE A	CAGE CODE 71A34	DWG. NO. ETD000030	REVISION A1
	SCALE			SHEET 3 OF 2