

**SUMMARY TEST DATA
 ON
 P1T-DC18-60-T-SFF-HSLVT**

Customer: _____
 SO No: _____
 Model No: P1T-DC18-60-T-SFF-HSLVT
 Serial No: PL43094/2348

Tested By: S. O'Neill
 Temperature: +25° C
 Date: 11/29/2023
 Drawing No: 27628081 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	DC to 18 GHz	0.01 GHz to 18 GHz	PMI QA2
2	Insertion Loss	4.5 dB Max.	3.5 dB	
3	Isolation	60 dB Min. (10 MHz - 12 GHz) 70 dB Min. (12 GHz - 18 GHz)	10 MHz - 12 GHz: 62.6 dB 12 GHz - 18 GHz: 81.7 dB	
4	Leakage	60 dB Min. (10 MHz - 12 GHz) 70 dB Min. (12 GHz - 18 GHz)	10 MHz - 12 GHz: > 90 dB 12 GHz - 18 GHz: 92.9 dB	
5	VSWR: In/Out	2:1 Max.	1.7:1 In 1.68:1 Out	
6	DC SUPPLY	-5VDC @ 25 mA Max.	-5VDC @ 16mA	
7	Control Signal	TTL LOGIC '0': Insertion Loss '1': Isolation	PASS	PMI QA2




QA/QC Approval: *Cameron Wiley* PMI QA2

Date: 11/30/23

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
 Email: sales@pmi-rf.com


SUMMARY TEST DATA ON P1T-DC18-60-T-SFF-HSLVT

PL43094/2348

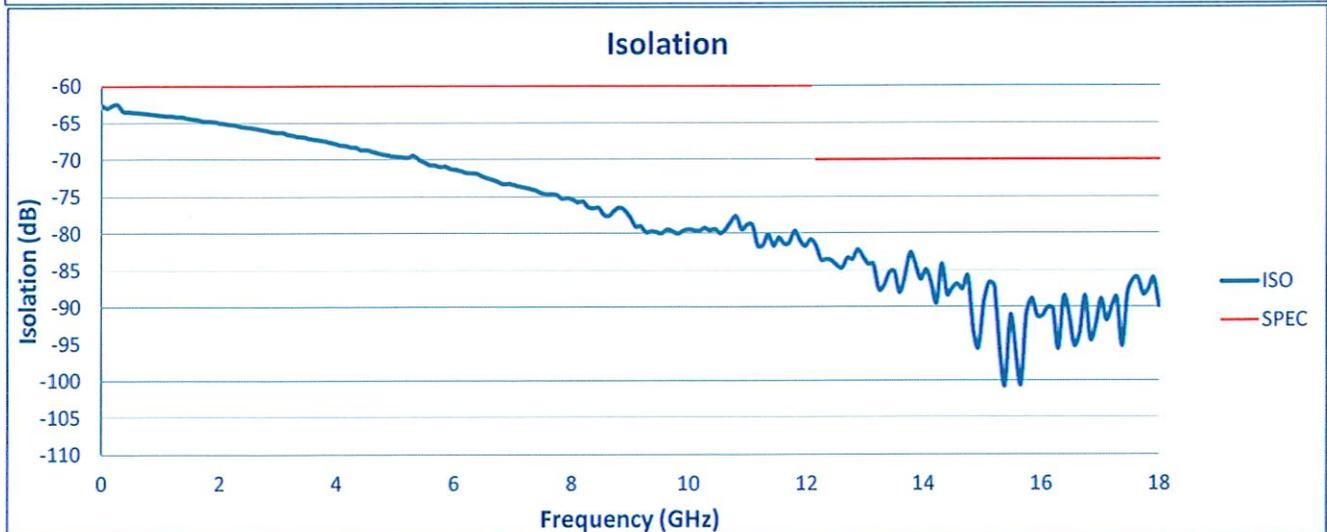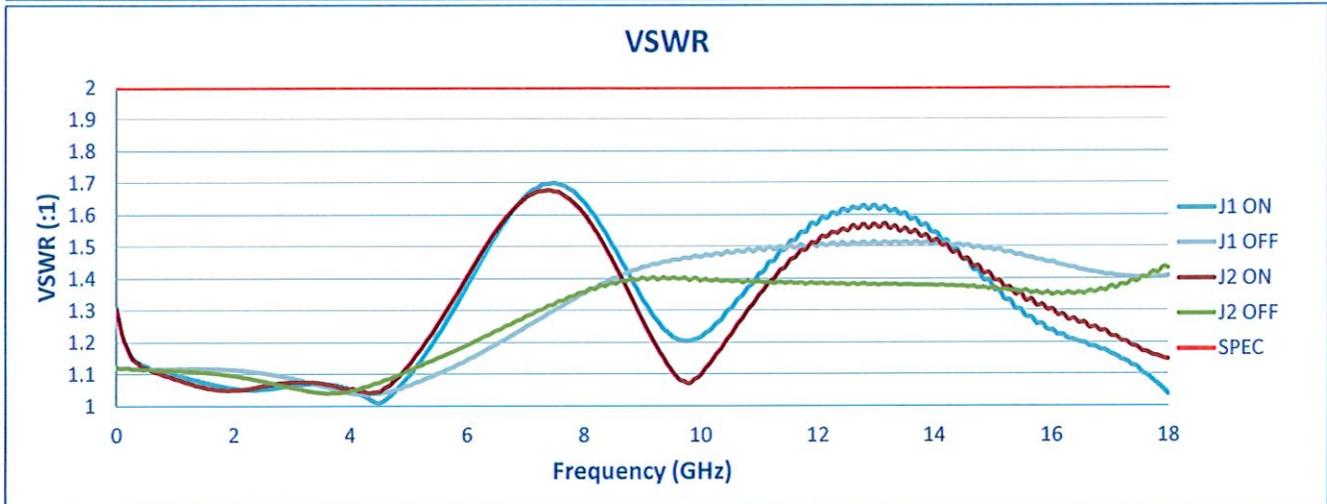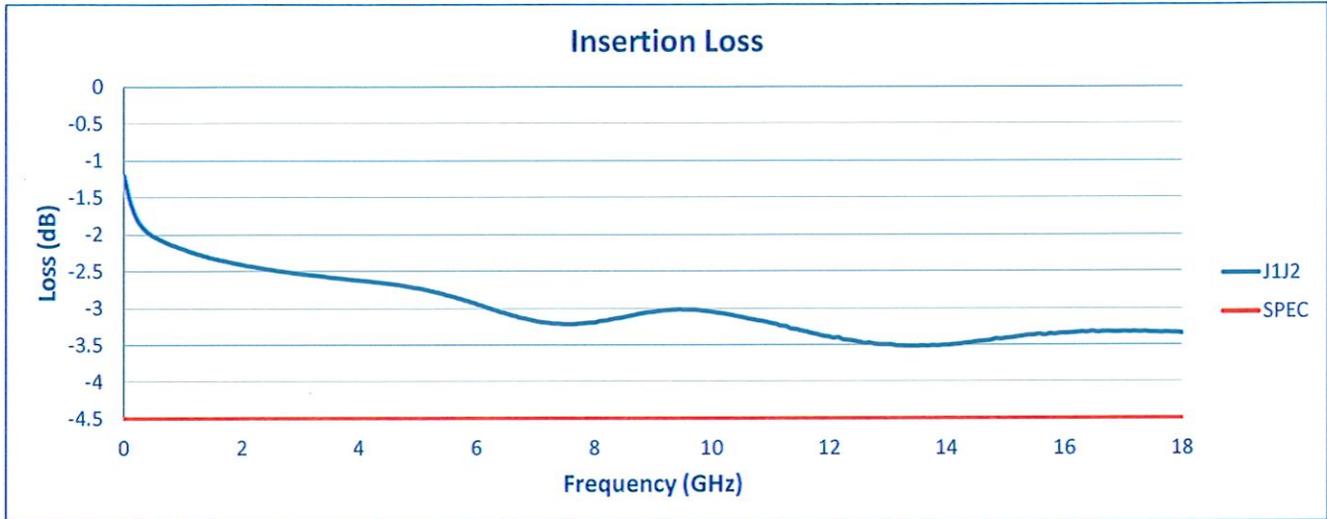

**SUMMARY TEST DATA
ON
P1T-DC18-60-T-SFF-HSLVT**

Leakage

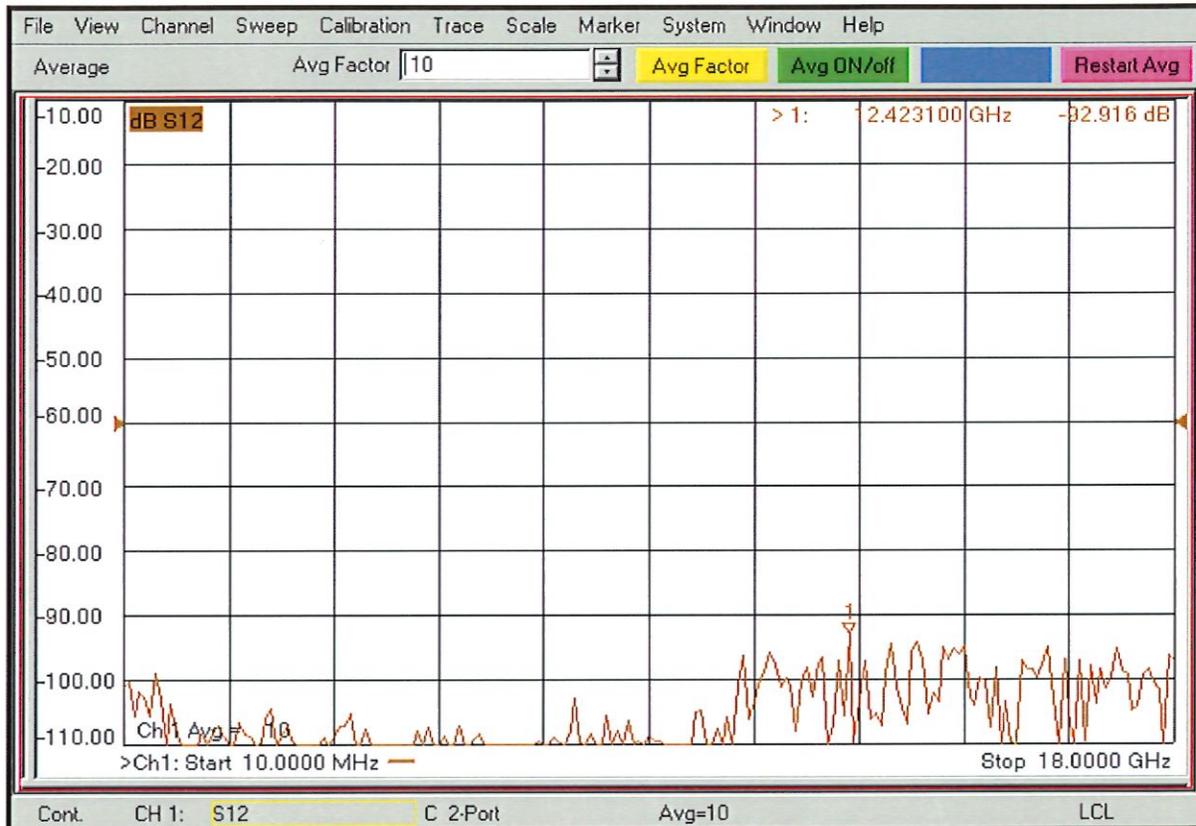

Test Notes:

- Connect Port 1 of PNA to input to DUT
- Terminate RF output of DUT to 50 Ohms
- Use Port 2 of PNA and perform "sniff" test around CTRL and DC lines
- Plot worst case (must meet RF Leakage specifications)