

**SUMMARY TEST DATA
ON
P1T-DC18-60-T-SFF-HSLVT**

Customer: _____
 SO No: _____
 Model No: P1T-DC18-60-T-SFF-HSLVT
 Serial No: PL43107/2348

Tested By: S. O'Neill
 Temperature: +25° C
 Date: 11/29/2023
 Drawing No: 27628081 Rev: A1




TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range	DC to 18 GHz	0.01 GHz to 18 GHz	PMI QA2	
2	Insertion Loss	4.5 dB Max.	3.5 dB		
3	Isolation	60 dB Min. (10 MHz - 12 GHz) 70 dB Min. (12 GHz - 18 GHz)	10 MHz - 12 GHz: 62.2 dB 12 GHz - 18 GHz: 80.7 dB		
4	Leakage	60 dB Min. (10 MHz - 12 GHz) 70 dB Min. (12 GHz - 18 GHz)	10 MHz - 12 GHz: > 90 dB 12 GHz - 18 GHz: 91.9 dB		
5	VSWR: In/Out	2:1 Max.	1.69:1 In 1.53:1 Out		
6	DC SUPPLY	-5VDC @ 25 mA Max.	-5VDC @ 16mA		
7	Control Signal	TTL LOGIC '0' : Insertion Loss '1' : Isolation	PASS		PMI QA2

QA/QC Approval: _____

Cammy Kelly PMI
QA2


Date: 11/30/23

**SUMMARY TEST DATA
ON
P1T-DC18-60-T-SFF-HSLVT**

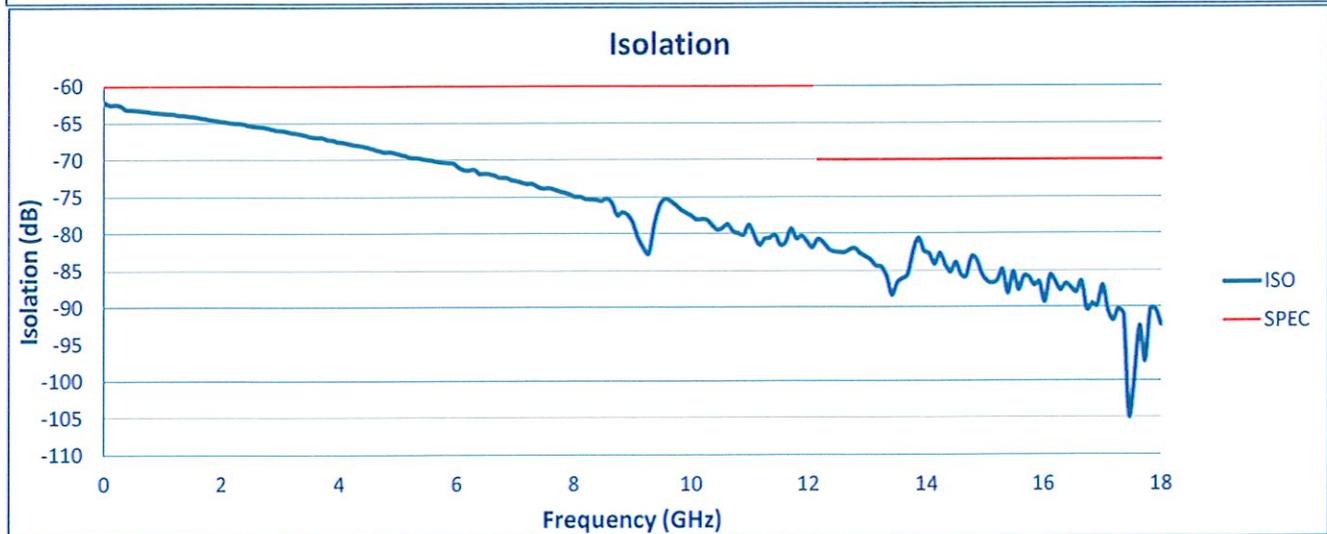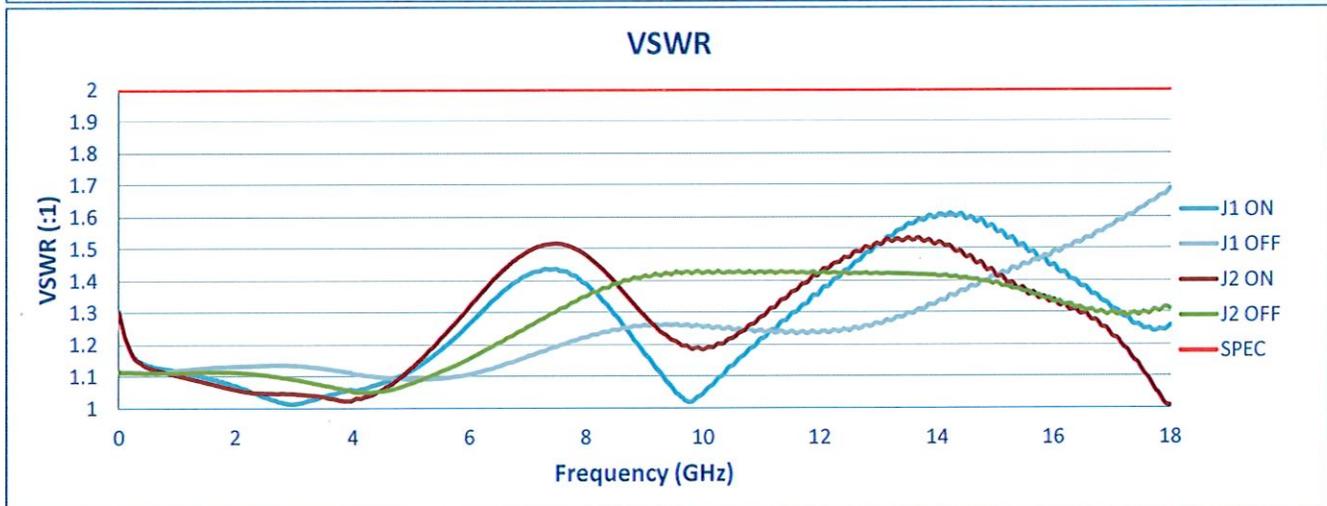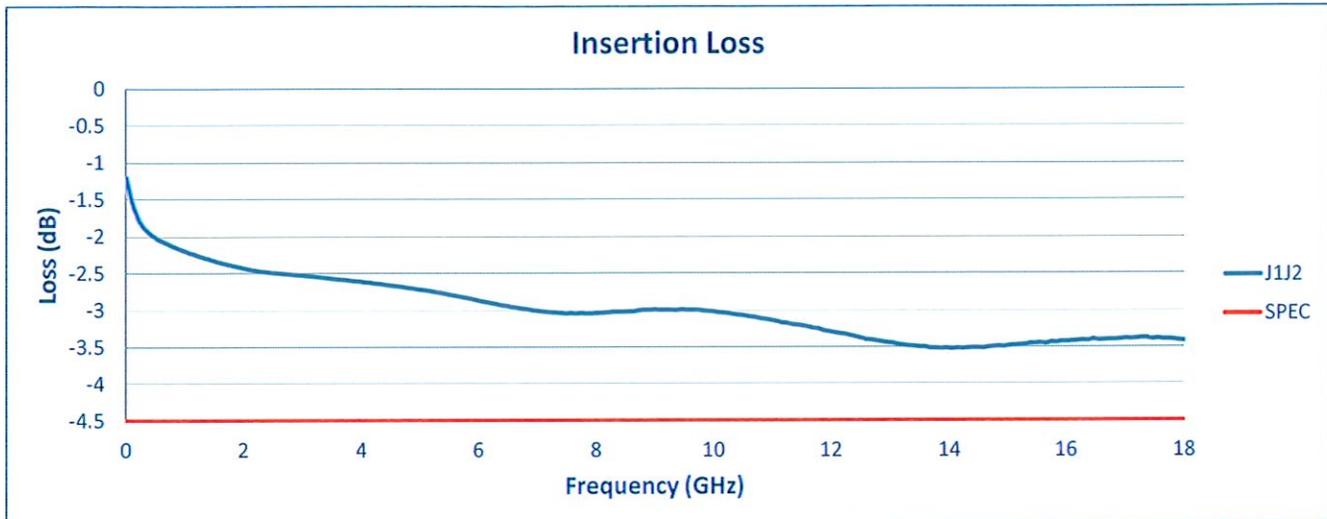

**SUMMARY TEST DATA
ON
P1T-DC18-60-T-SFF-HSLVT**

Leakage

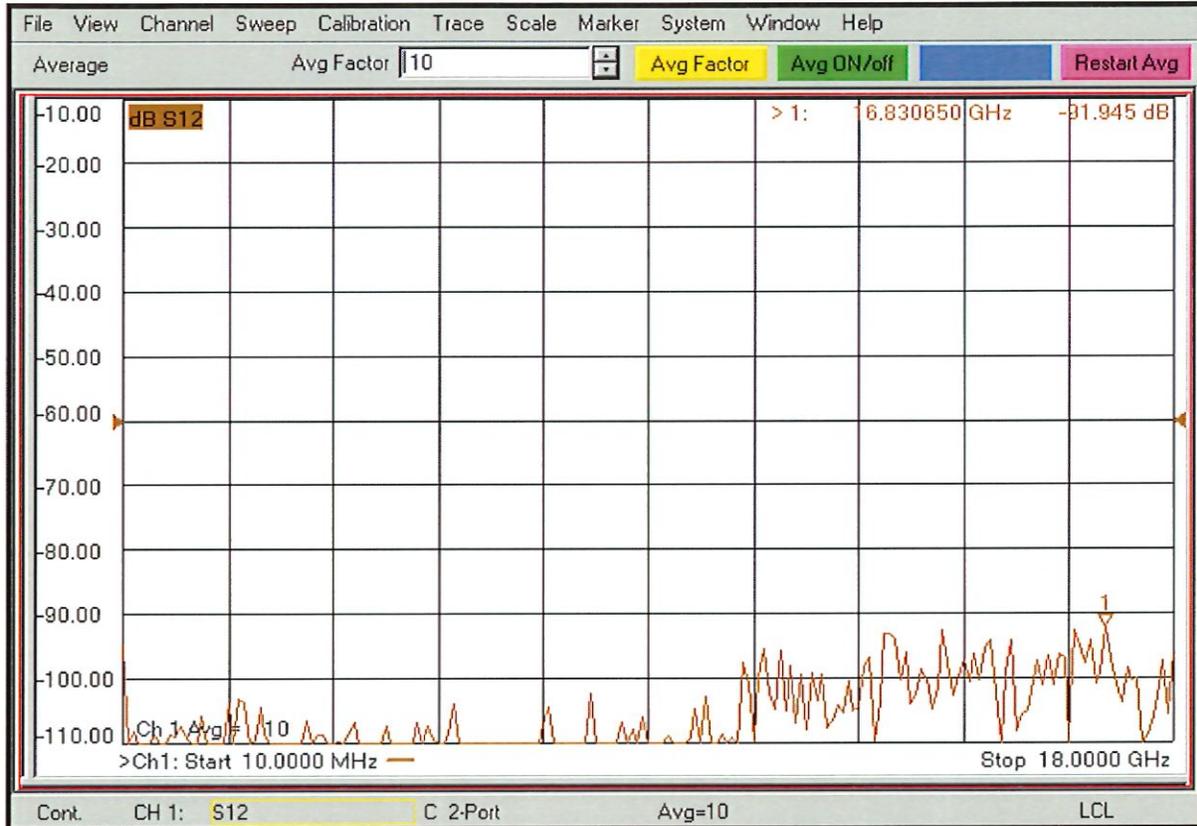

Test Notes:

- Connect Port 1 of PNA to input to DUT
- Terminate RF output of DUT to 50 Ohms
- Use Port 2 of PNA and perform "sniff" test around CTRL and DC lines
- Plot worst case (must meet RF Leakage specifications)