



SUMMARY TEST DATA ON AMPLIFIER

Customer :
Job No :
Model No : PE2-40-218-15-SFF
Serial No : PL5181

Tested By : Hugo G.
Temperature : +25°C
Date : 01/16/09

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	REMARKS QA/QC
1	Frequency Range:	0.2-18.0 GHz	Pass	
2	*Gain:	+38 to 43 dB	Pass (See Plots)	
3	Gain Flatness:	±1.25dB Max.	(See Plots)	
4	VSWR:	Input : 2.0:1 Output: 2.0:1 (Max.)	Pass (See Plots)	
5	Temperature Stability:	±1.5dB Max.	Pass	
5	Noise Figure:	5.0dB Max.	Pass	
6	Psat Output:	15dBm Max.	Pass	
7	DC Supply:	225mA@ +12V Max.	217mA	
8	Operating Temperature:	-55 to +85 Deg. C	Pass	
9	Storage Temperature:	-55 to +120 Deg. C	Pass	


*Over operating temperature and frequency.

Production Manager Approval: _____ **Date:** 01/16/09

QA/QC Approval: _____ **Date:** 01/16/09

5715 Industry Lane, Unit 11, Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
 email: sales@planarelec.com

Swept S-Parameter Plot

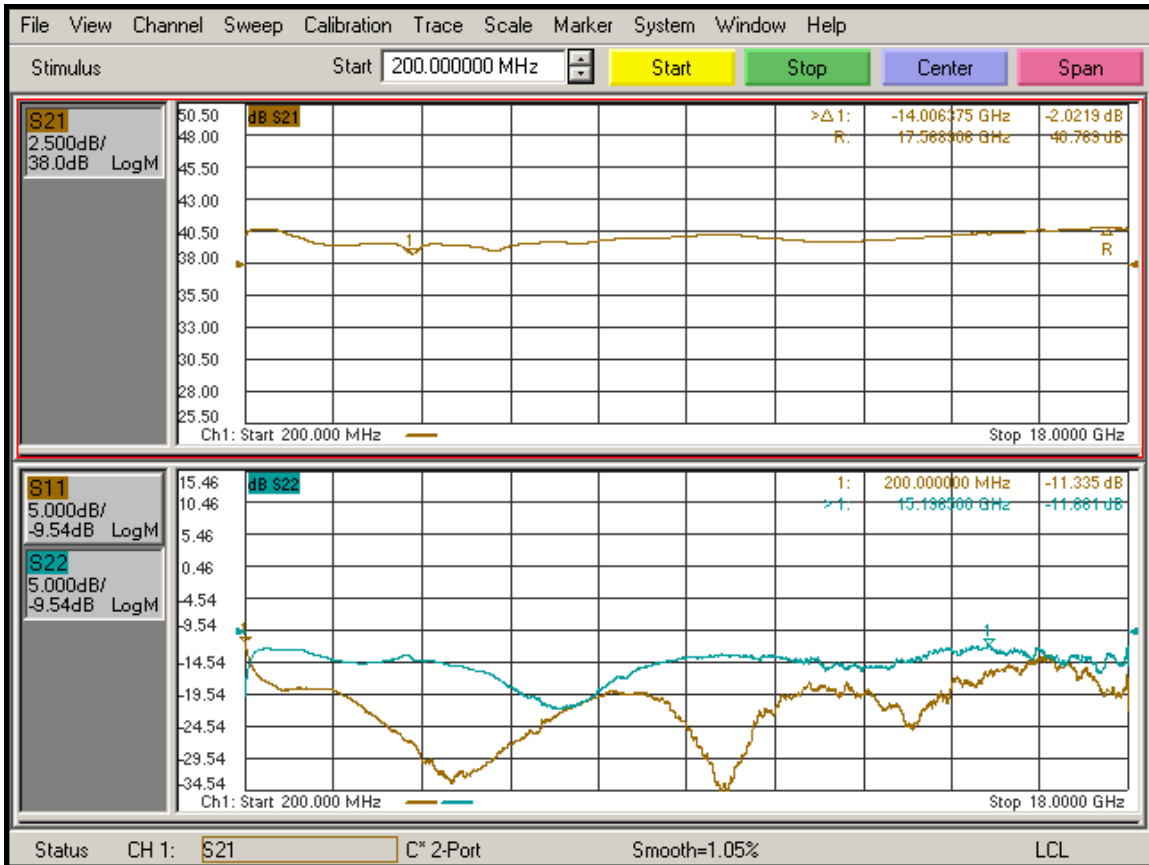

Noise Figure-Parameter Plot

