

**SUMMARY TEST DATA
ON
PEC-30-500M40G-20-12-292FF-OPT250M**

Customer: _____
SO No: _____
Model No: PEC-30-500M40G-20-12-292FF-OPT250M
Serial No: PL54131/2528



Tested By: Alfredo Lopez / Darwin Martinez-C.
Temperature: +25°C
Date: 7/11/2025
Drawing No: 26950600 REV: A1

TEST ITEM NO	PARAMETERS	SPECIFIED VALUE	Test Results	QA
			+25°C	QC
1	Frequency Range:	250 MHz - 40 GHz	250 MHz - 40 GHz	PMI QA2
2	Gain:	+25 dB Nom	+ 27.21 dB Max. + 23.35 dB Min. See Graph	
3	Gain Flatness:	±2.0 dB Max (+25°C to +85°C) (±3.0 Max. @ -55°C)	±1.93 dB See Graph	
4	Noise Figure:	5.5 dB Typ (0.25-26.5 GHz) 7.0 dB Max (26.5 to 40 GHz)	5.47 dB	
			(0.25 to 26.5 GHz)	
			6.2 dB	
			(26.5 to 40 GHz) See Graph	
5	OP1dB:	+18 dBm Min (0.25-10 GHz) +17 dBm Min (10-18 GHz) +15 dBm Min (18-40 GHz)	+ 18.29 dBm	
			+ 18.66 dBm	
			+ 17.77 dBm	
			See Graph	
6	P _{sat} :	+25 dBm Max (0.25-18 GHz) +22 dBm Max (18-40 GHz)	+ 21.88 dBm	
			+ 20.62 dBm	
			See Graph	
7	Input Power Handling:	+23 dBm Max (0.25 - 26 GHz) +20 dBm Max (26-40 GHz)	Pass See typical Characteristics	
8	VSWR: (Input/Output)	2.0:1 Max. (Input) 2.5:1 Max. (Output)	1.83 :1 (In)	
			1.56 :1 (Out)	
			See Graph	
9	DC Supply:	+12 to +15 VDC @ 400 mA Max (I _q)	+12 to +15 VDC @ 305 mA	PMI QA2


QA/QC Approval:  PMI QA2

Date: 7/14/2025


**SUMMARY TEST DATA
ON
PEC-30-500M40G-20-12-292FF-OPT250M**

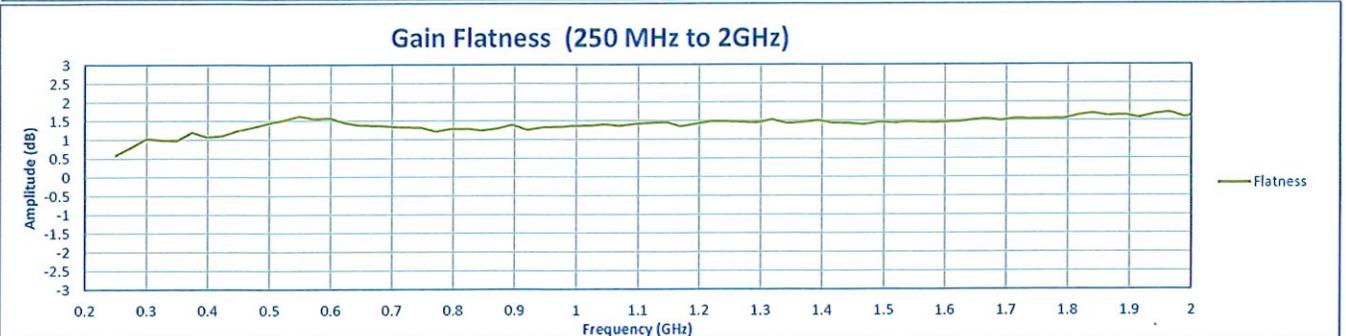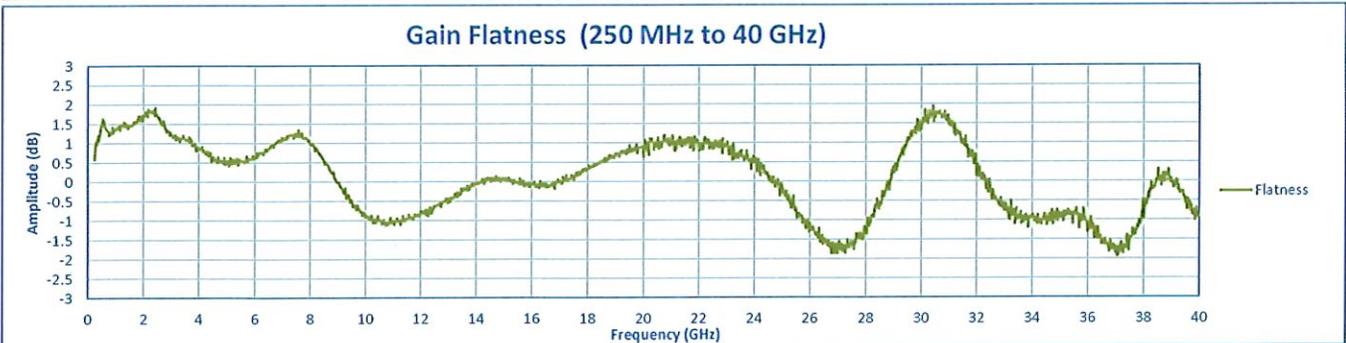

**SUMMARY TEST DATA
ON
PEC-30-500M40G-20-12-292FF-OPT250M**

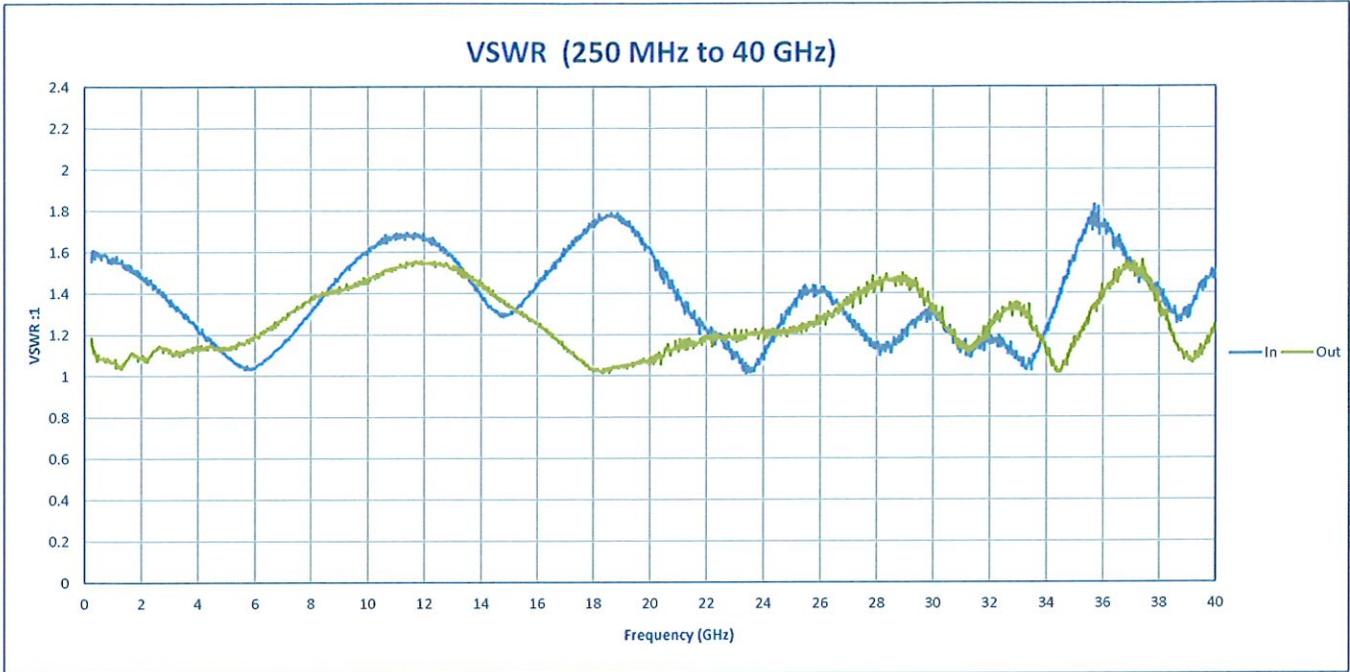


**SUMMARY TEST DATA
ON
PEC-30-500M40G-20-12-292FF-OPT250M**

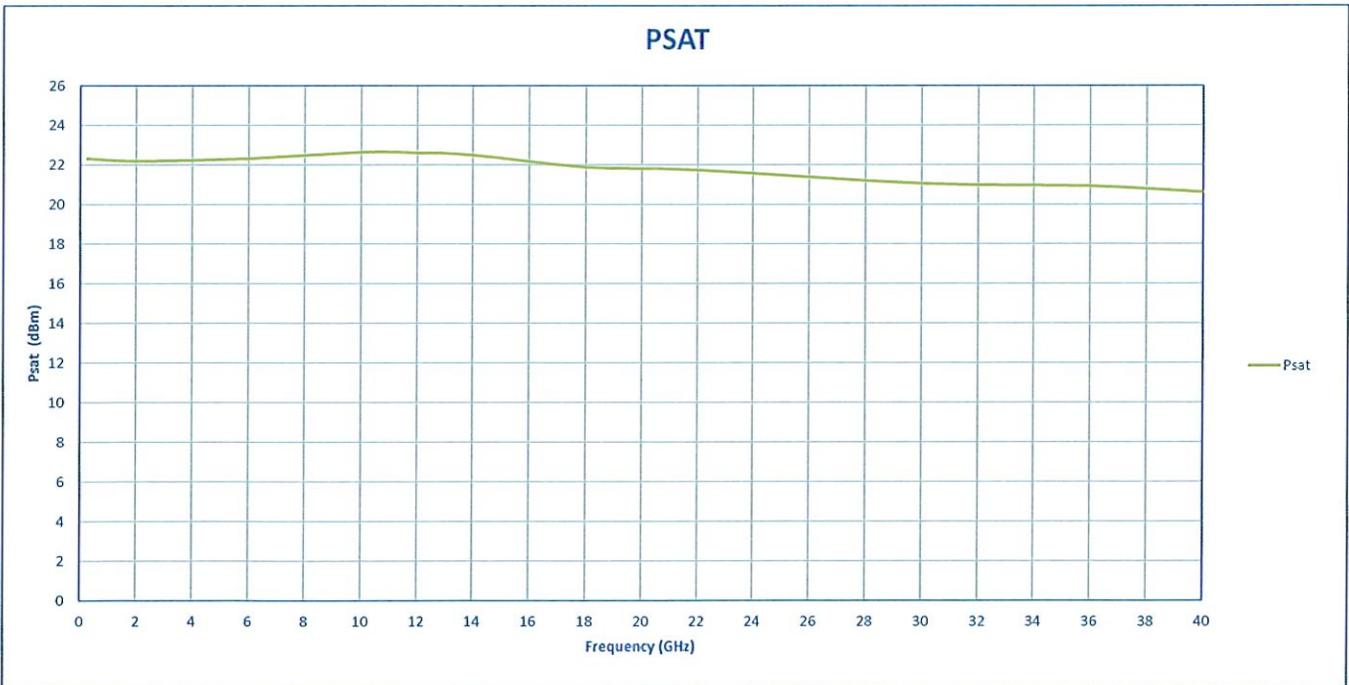

**SUMMARY TEST DATA
 ON
 PEC-30-500M40G-20-12-292FF-OPT250M**

Noise Figure(0.25 to 26.5 GHz)

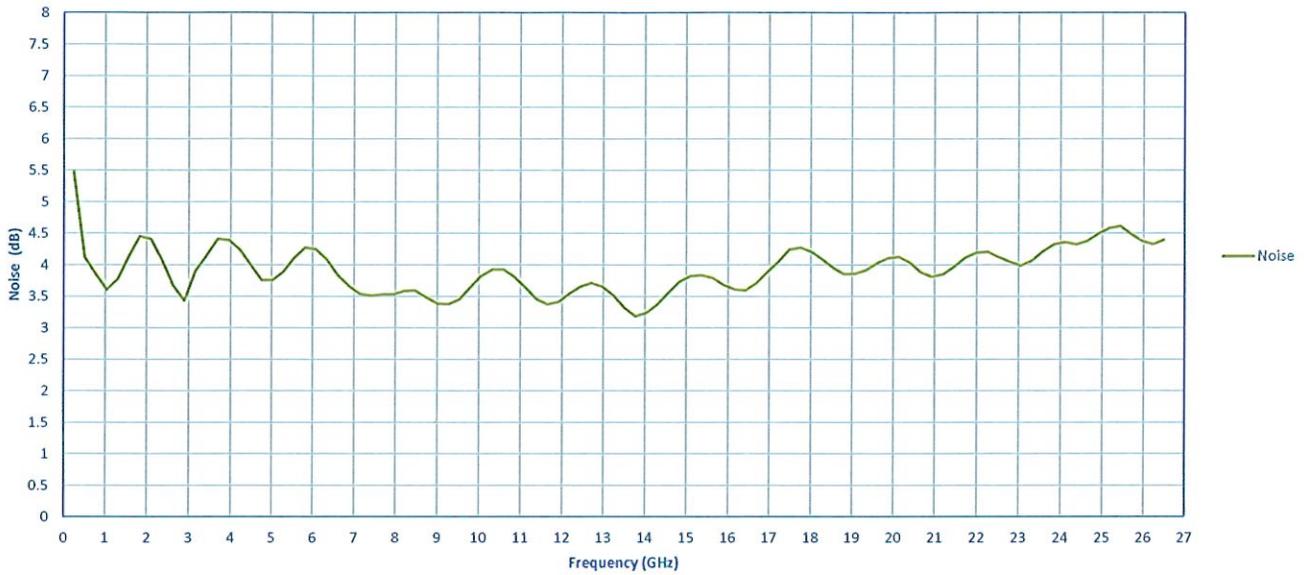

Noise Figure(26.5 to 40 GHz)

