

SUMMARY TEST DATA ON LM-0R5G2G-RAD-3W-23DBM-SMF

Customer: _____
SO No: _____
Model No: LM-0R5G2G-RAD-3W-23DBM-SMF
Serial No: PL55382/2538

Tested By: K Craven
Temperature: +25°C
Date: 9/16/2025
Drawing No: 27646440

REV: A2

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
1	Frequency Range:	0.5 GHz to 2 GHz	0.5 GHz to 2 GHz	PMI QA
2	Insertion Loss:	0.9 dB Max.	0.39 dB See Graph	
3	VSWR:	1.5:1 Max.	1.3:1 In 1.36:1 Out See Graph	
4	Leakage Power:	200 mW (+23 dBm) Typ.	+ 15.44 dBm See Graph	
5	Power Handling:	3W CW Max. 1 kW Max. 0.1% DC 1 us PW	Pass See Typical Characteristics	
6	Recovery Time:	200 ns Max.	Pass See Typical Characteristics	PMI QA

QA/QC Approval:

Cummary Kling


Date:

9/17/25


SUMMARY TEST DATA ON LM-0R5G2G-RAD-3W-23DBM-SMF

PL55382/2538

Insertion Loss

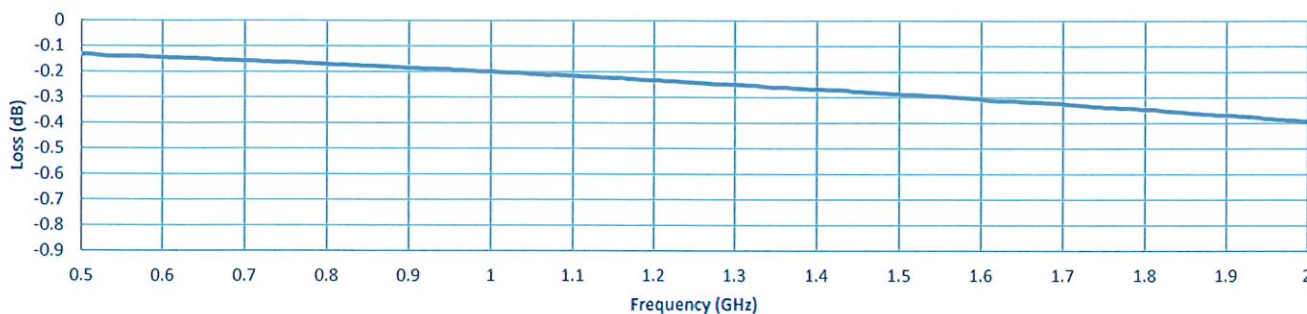

VSWR

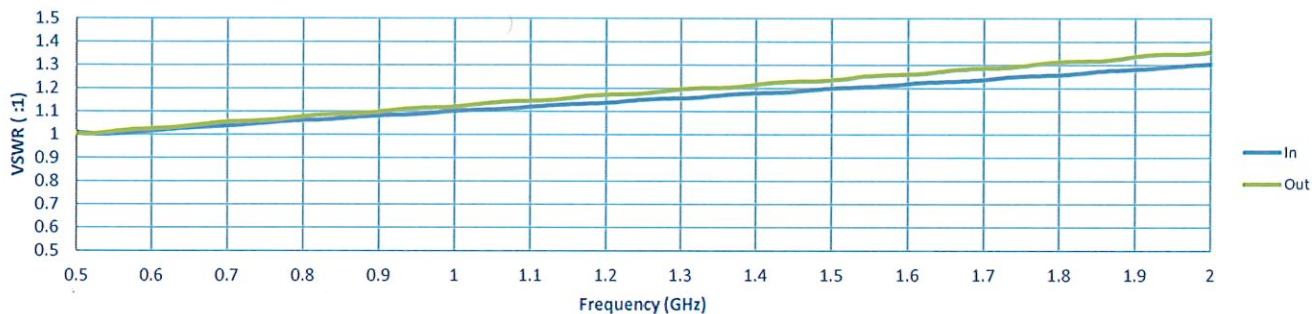

Limiter Response with Frequency

