



**SUMMARY TEST DATA
ON
BPF-2D2G2D29G-5W-SFF**

Customer: _____
 SO: _____
 Model No: **BPF-2D2G2D29G-5W-SFF**
 Serial No: **PL59405/2618**

Tested By: **OLIVER K**
 Temperature: **25°C**
 Date: **4/27/2026**
 Drawing No: **27653680** Rev: **A1**


TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA/QC	
1	Passband Frequency Range	2.2 GHz to 2.29 GHz	2.2 GHz to 2.29 GHz	PMI QA6	
2	Insertion Loss	0.8 dB Max.	0.55 dB		
3	Ripple	±0.2 dB Max.	±0.09 dB		
4	VSWR	1.3:1 Max.	1.19:1		
5	Rejection @ DC to 2.11 GHz	40 dB Min.	57.1 dB		
6	Rejection @ 2.4 GHz to 5 GHz	40 dB Min.	53.7 dB		
7	Input Power	5W CW Max.	5W		PMI QA6

* FOR ALL OTHER SPECIFICATIONS, PLEASE SEE TYPICAL CHARACTERISTICS ON THE PMI WEBSITE


QA/AC Approval: Anthony Hardy PMI QA6

Date: 4/29/26

**SUMMARY TEST DATA
ON
BPF-2D2G2D29G-5W-SFF**

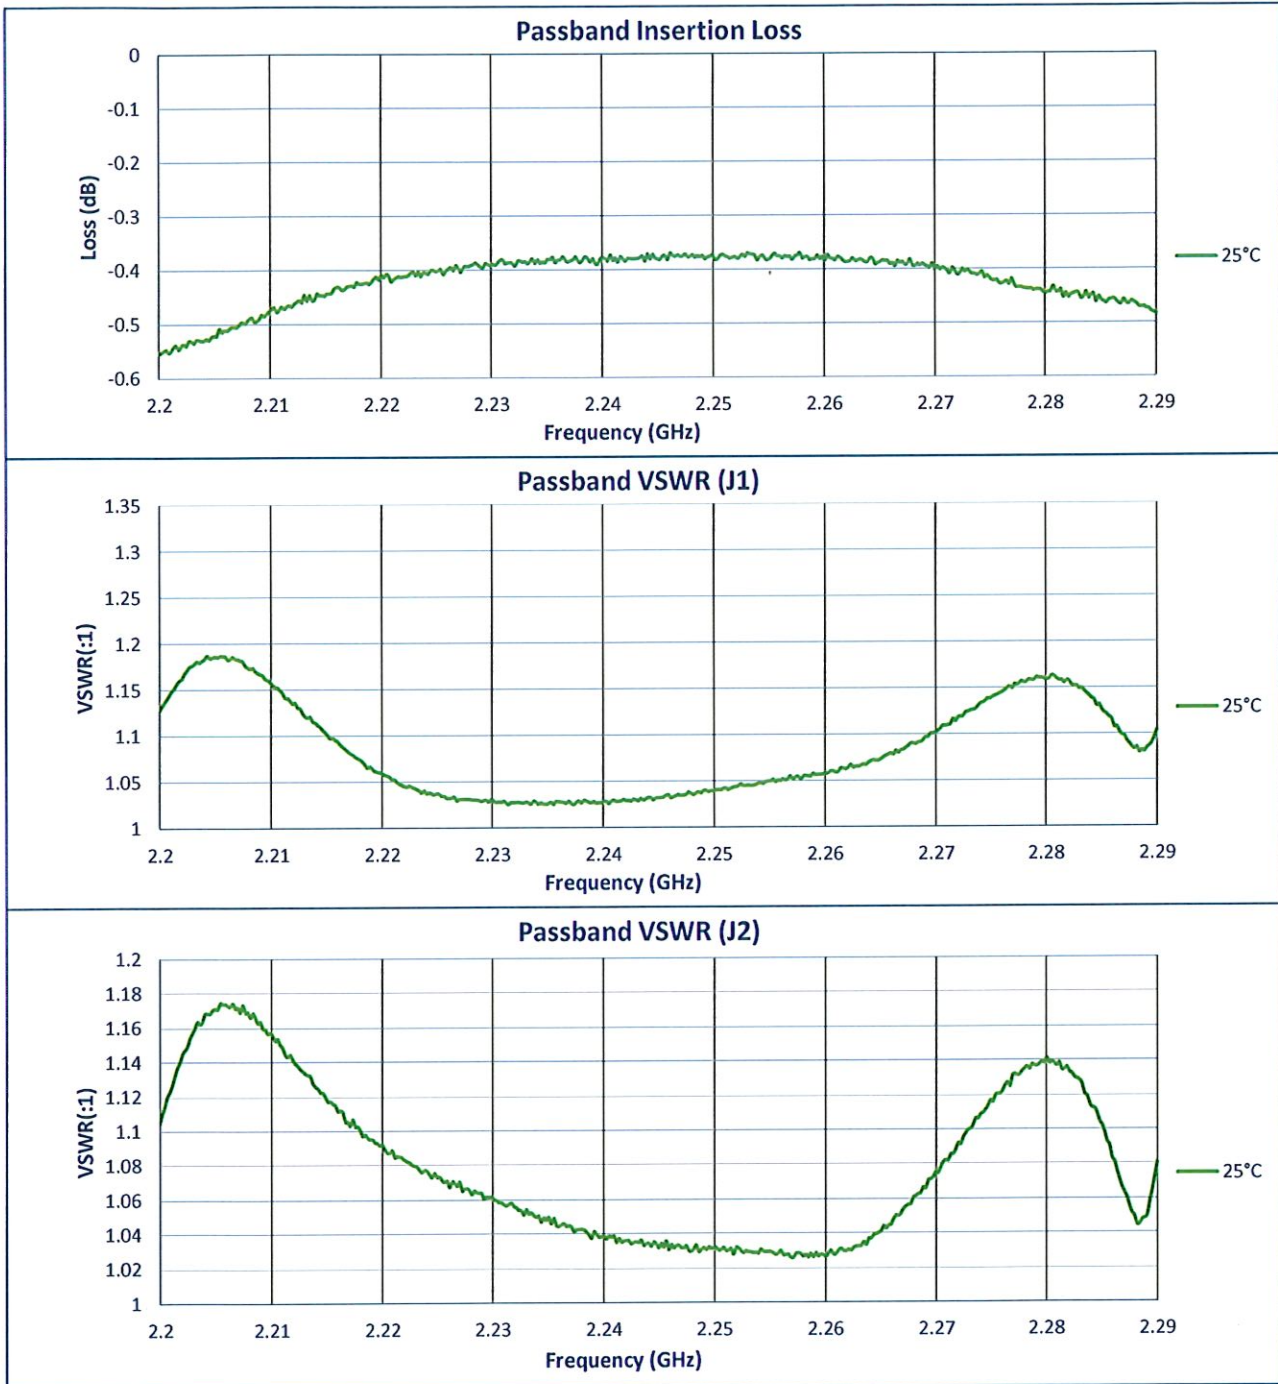

**SUMMARY TEST DATA
ON
BPF-2D2G2D29G-5W-SFF**

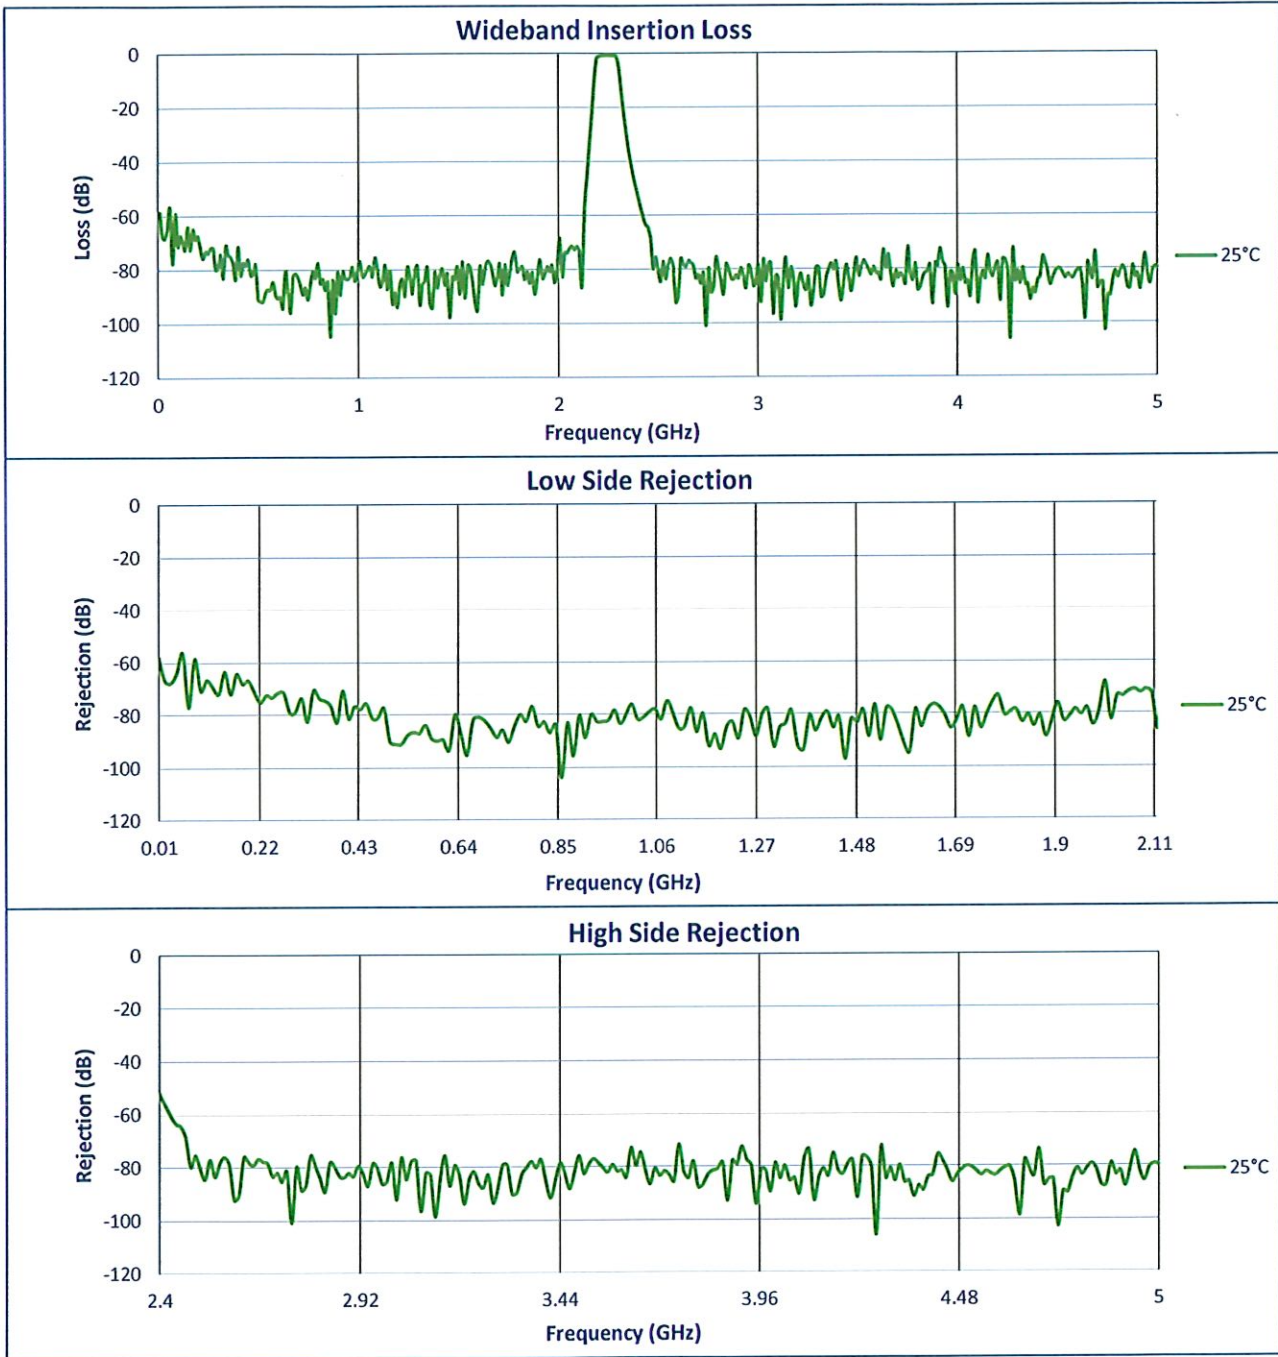

**SUMMARY TEST DATA
ON
BPF-2D2G2D29G-5W-SFF**

