Quantic PMI
PLANAR MONOLITHICS

SUMMARY TEST DATA
ON
P2T-1840-30-R-1W-292FF

Customer: [redacted]
SO No: [redacted]
Model No: P2T-1840-30-R-1W-292FF
Serial No: PL62535/2639

Tested By: Anuar P.
Temperature: 25°C
Date: 9/21/2026
Drawing No: 26950050 Rev: A1


TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	18 GHz to 40 GHz	**18 GHz to 40 GHz**	PMI QA6
2	Insertion Loss	2.5 dB Typ., 3.0 dB Max.	**2.96 dB**	
3	Operating Power CW	1 Watts Max	**Pass See Typical Characteristics**	
4	VSWR: In/Out	2.5:1 Max. 2:1 Typ.	**1.79:1 In** **1.83:1 Out**	
5	Isolation	35 dB Typ., 30 dB Min.	**46.1 dB**	
6	Switching Speed	500 ns Max. 100 ns Typ.	**Pass See Typical Characteristics**	
7	Control Signal	TTL LOGIC '1' : J1-J2 Low Loss '0' : J1-J3 Low Loss	**Pass**	
8	Power Supply	12 V @ 50 mA Max. -15 V @ 50 mA Max.	**12 V @ 33 mA** **-15 V @ 20 mA**	PMI QA6


QA/QC Approval: PMI QA6 Anthony Kacoly Date: 9/22/26


7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@quanticpmi.com

Quantic PMI
PLANAR MONOLITHICS

SUMMARY TEST DATA
ON
P2T-1840-30-R-1W-292FF

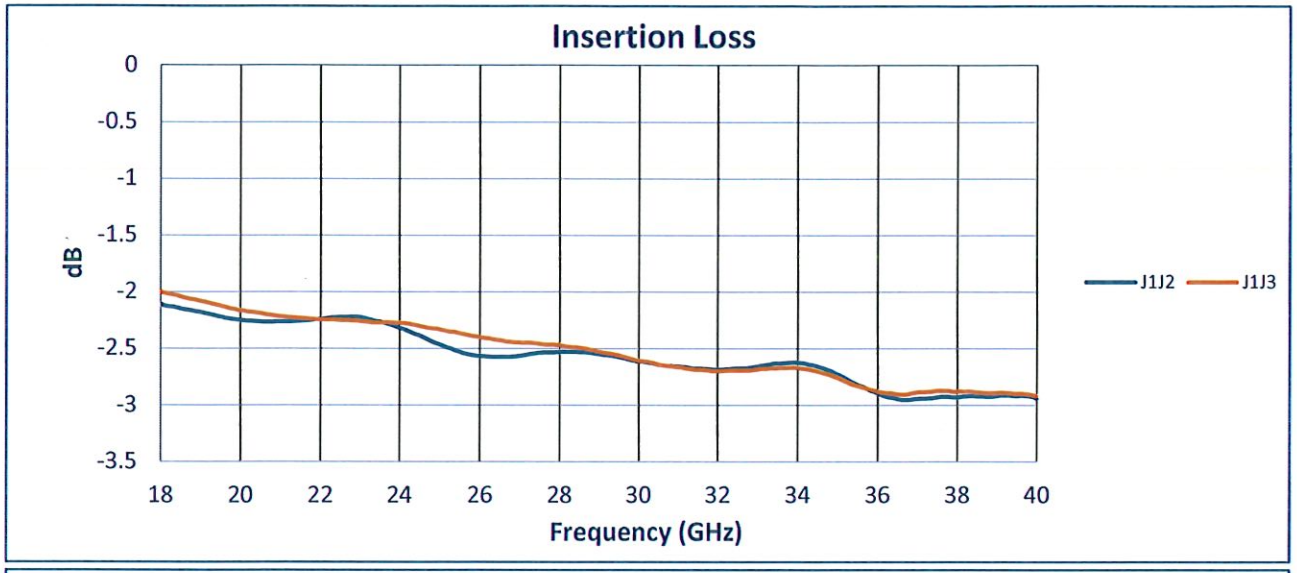

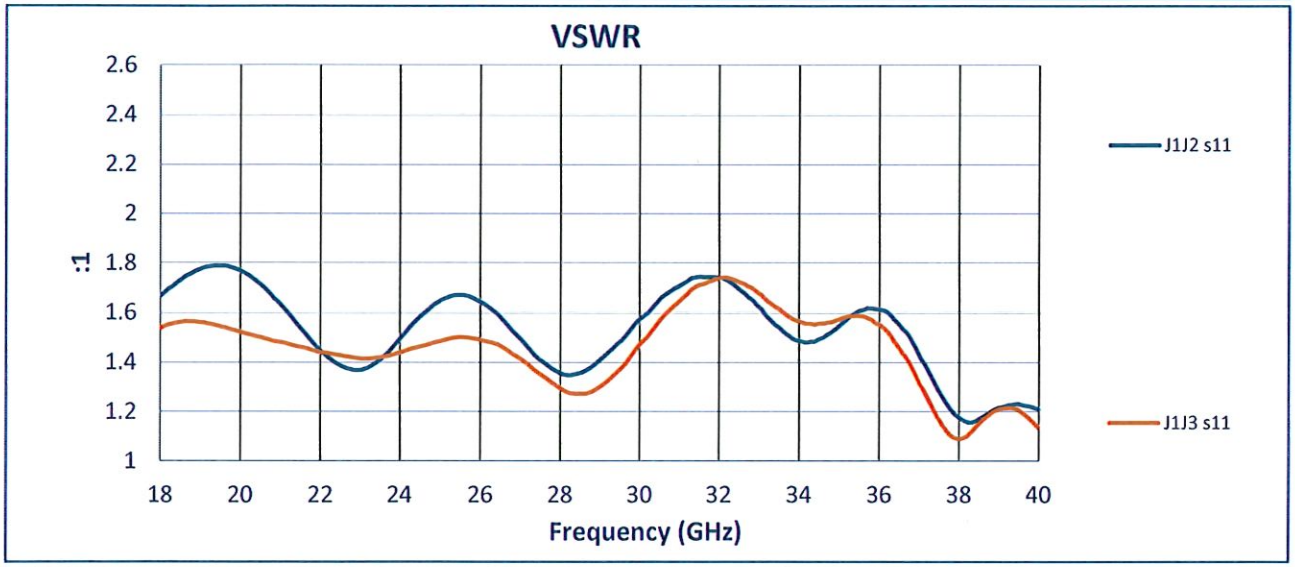

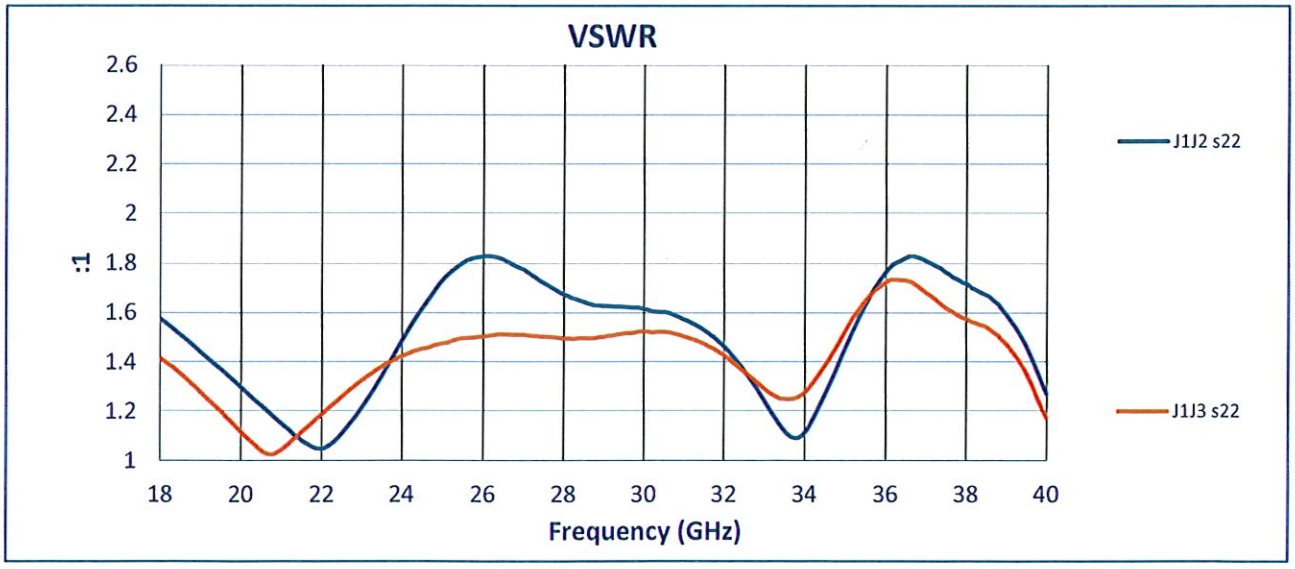


7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@quanticpmi.com

Quantic PMI
PLANAR MONOLITHICS

SUMMARY TEST DATA
ON
P2T-1840-30-R-1W-292FF

PL62535/2639

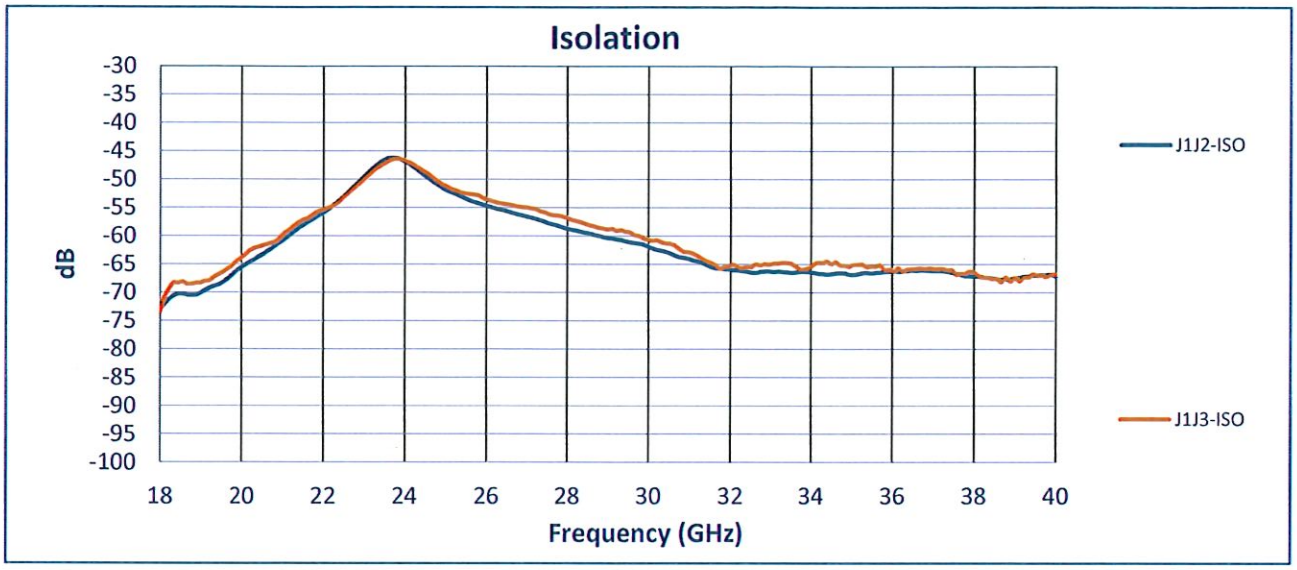

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@quanticpmi.com