




SUMMARY TEST DATA ON PUB-15-30M20G-20-LCA

Customer: _____
 SO No: _____
 Model No: PUB-15-30M20G-20-LCA
 Serial Pair: PL52933/2520

Tested By: Justen Gayduchik
 Temperature: 25 Degrees C
 Date: 5/15/2025
 Drawing No: PUB-15-30M20G-20-LCA REV: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC PMI GAS
1	Frequency Range:	30 MHz - 20 GHz	30 MHz - 20 GHz	
2	Gain:	+15 dB Typ.	13.93 dB Min. 17.27 dB Max. See Plot	
3	Gain Flatness:	±2.5 dB Typ.	± 1.67 dB See Plot	
4	Noise Figure:	3.0 dB Typ.	5.2 dB @ 230 MHz 2.6 dB @ 10 GHz 4.1 dB @ 20 GHz See Plot	
5	OP1dB:	+20 dBm Typ.	+21.18 dBm See Plot	
6	VSWR: (Input/Output)	2.0:1 Typ.	Input 1.78:1 Output 1.90:1 See Plot	
7	DC Supply:	+12 VDC to +15 VDC @ 180 mA Typ.	+12 VDC @ 206.4 mA	

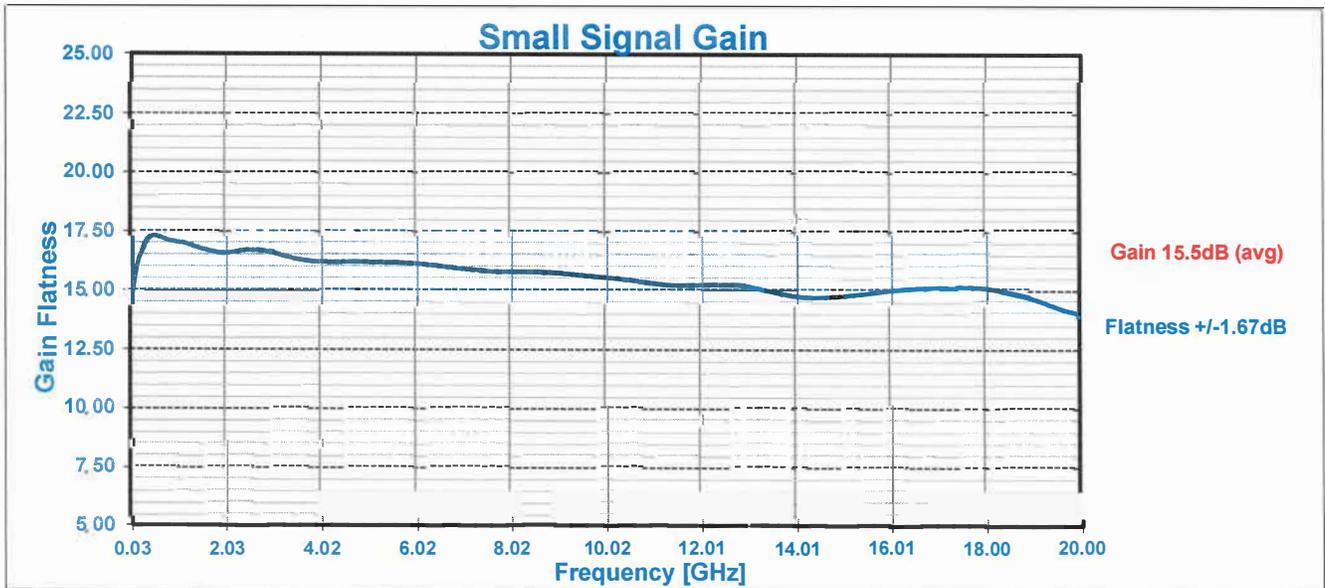

QA/QC Approval: *K. Klammer*


Date: 5-15-25




SUMMARY TEST DATA ON PUB-15-30M20G-20-LCA

PL52933/2520

Noise Figure

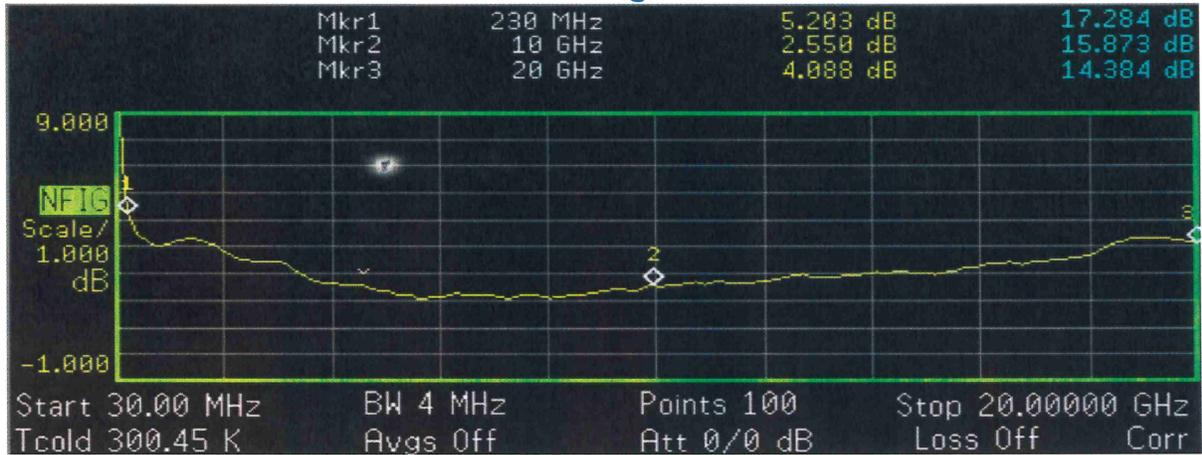

1dB Compression vs Frequency

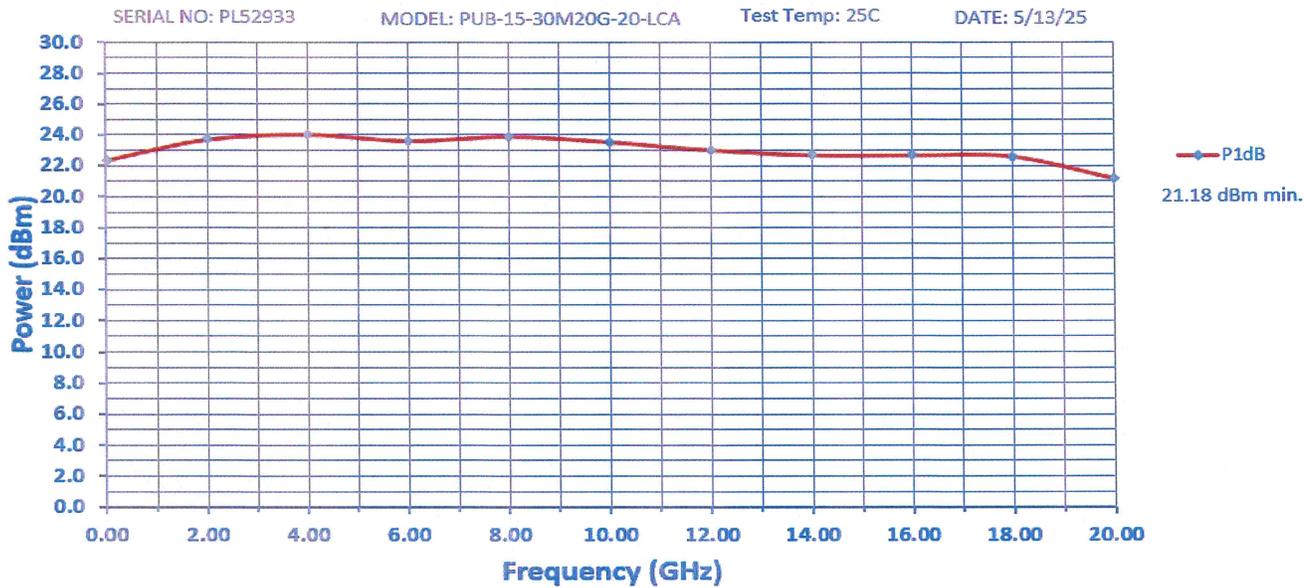



**SUMMARY TEST DATA
ON
PUB-15-30M20G-20-LCA**

PL52933/2520

